




瑞光

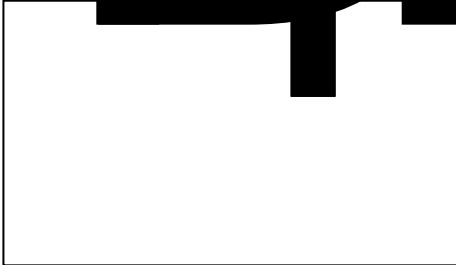


PR;



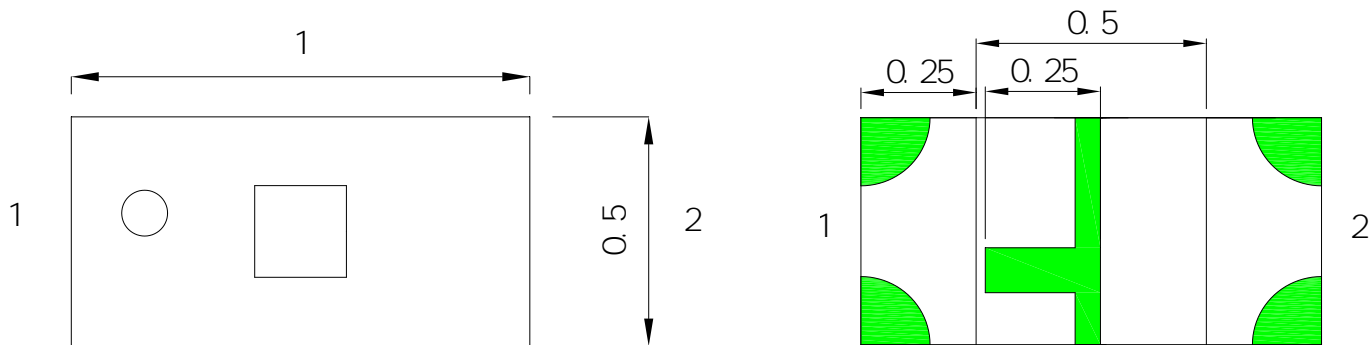

1.

±





章

承认专用

± 0.2

						μ



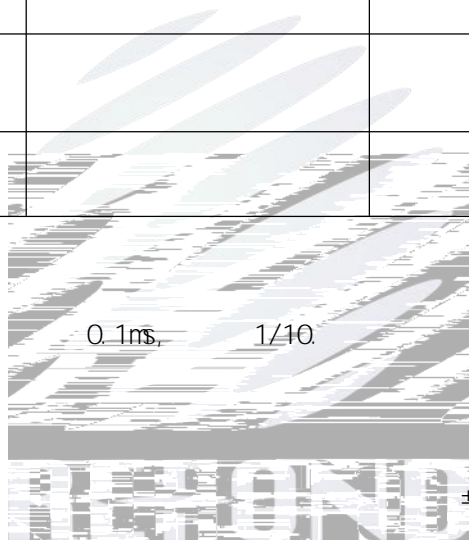




0.1ms, 1/10

± 0.1V.

± 2nm





± 10%



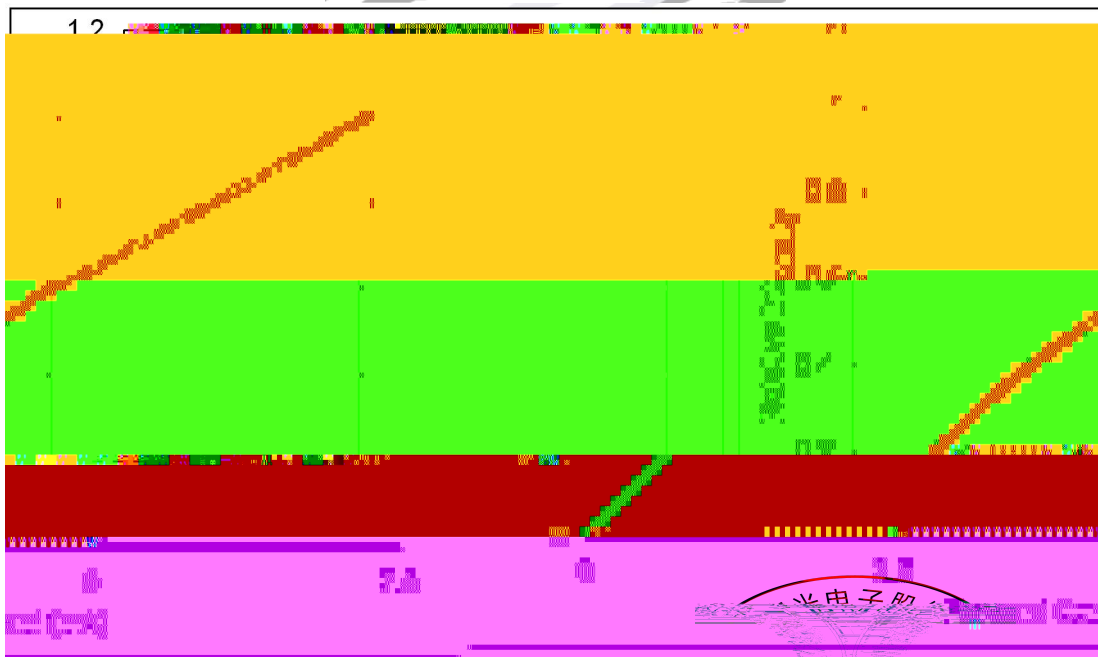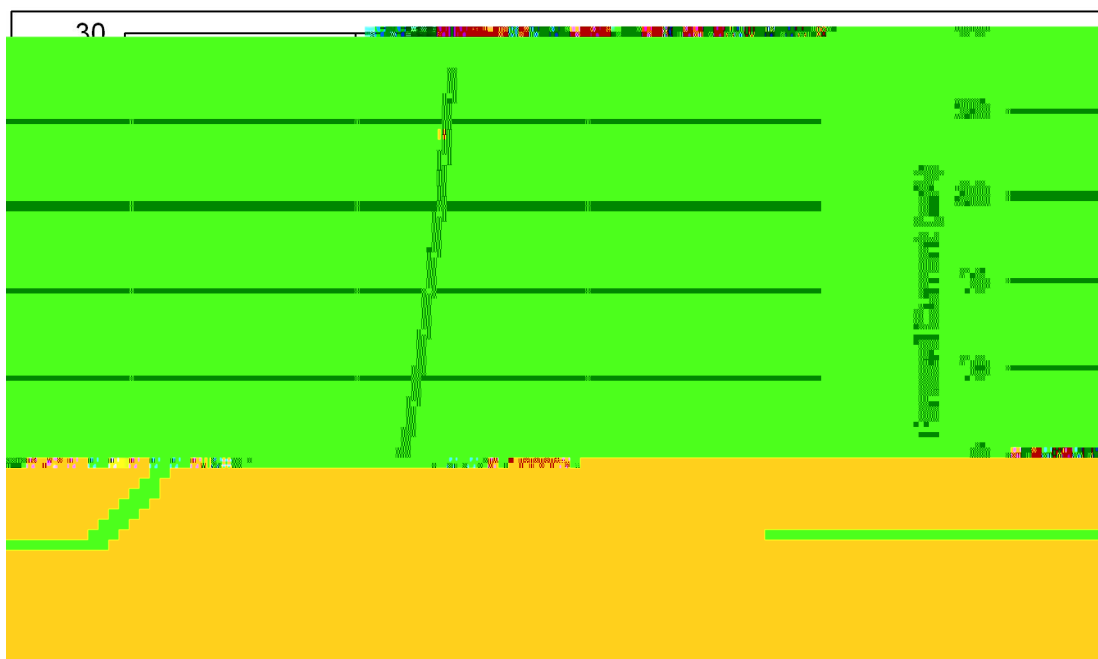



章 承认专用



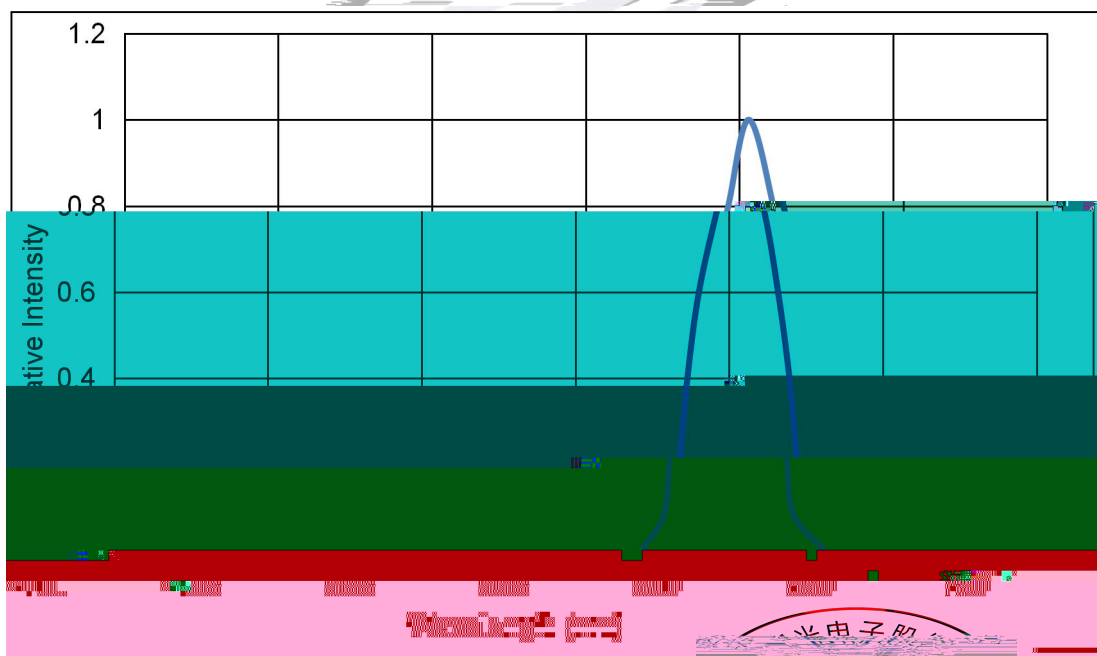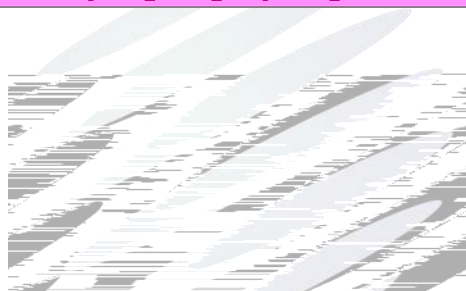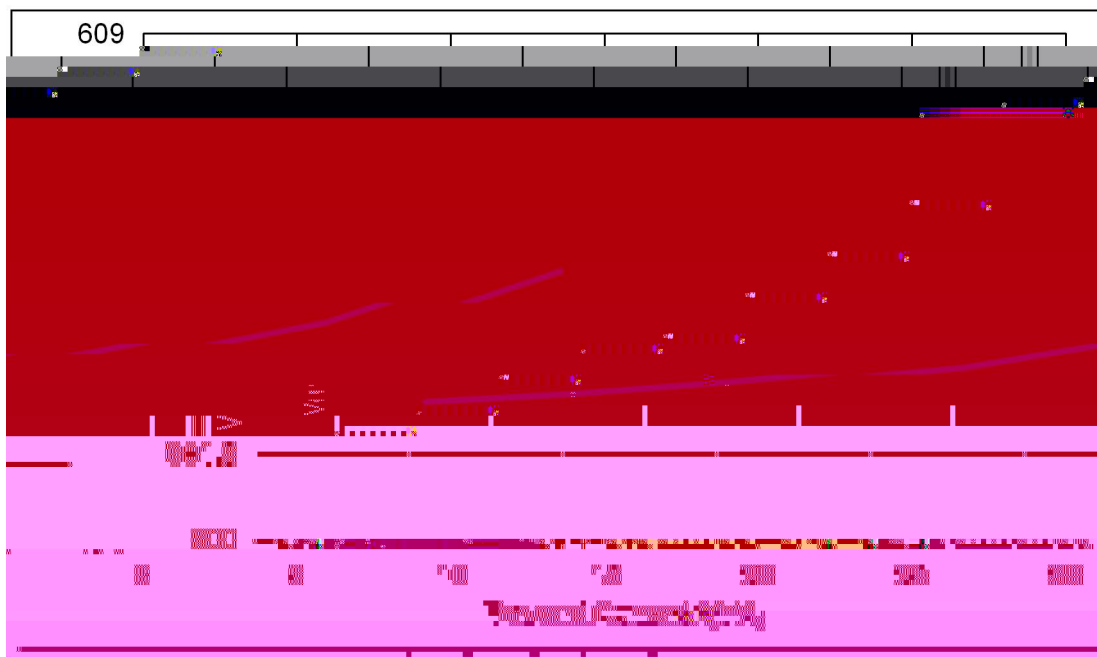

章 承认专用

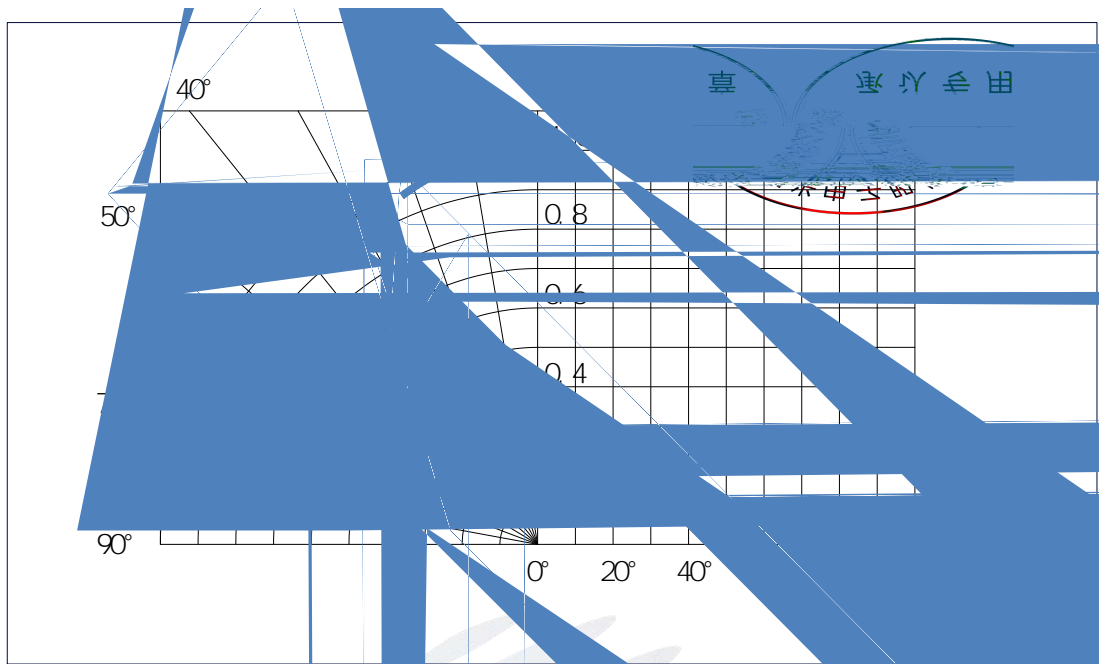

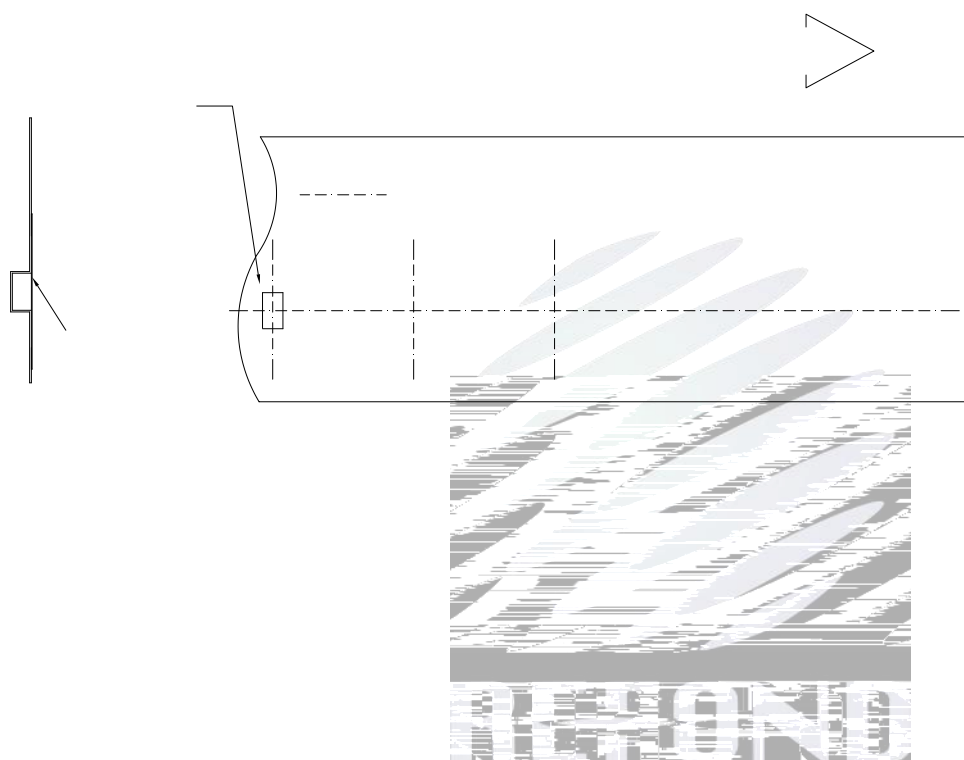






PART NO.:
SPEC NO:
LOT NO

BIN CODE:
Φ: XY:
VF: WLD:

QTY:
DATE:



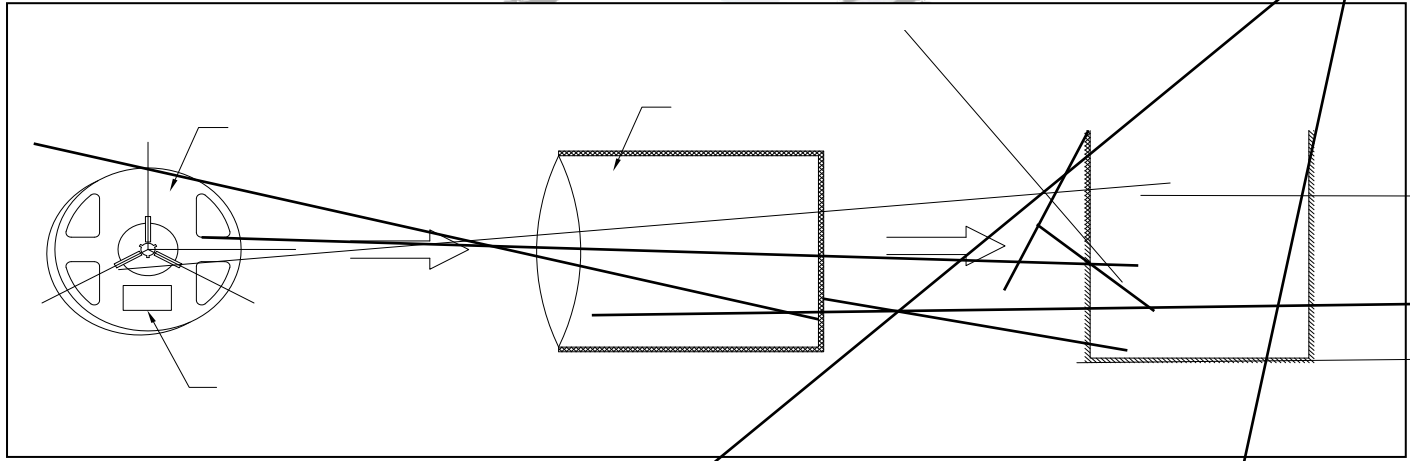


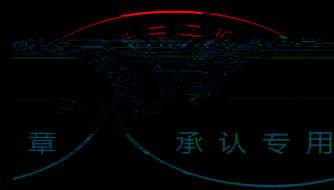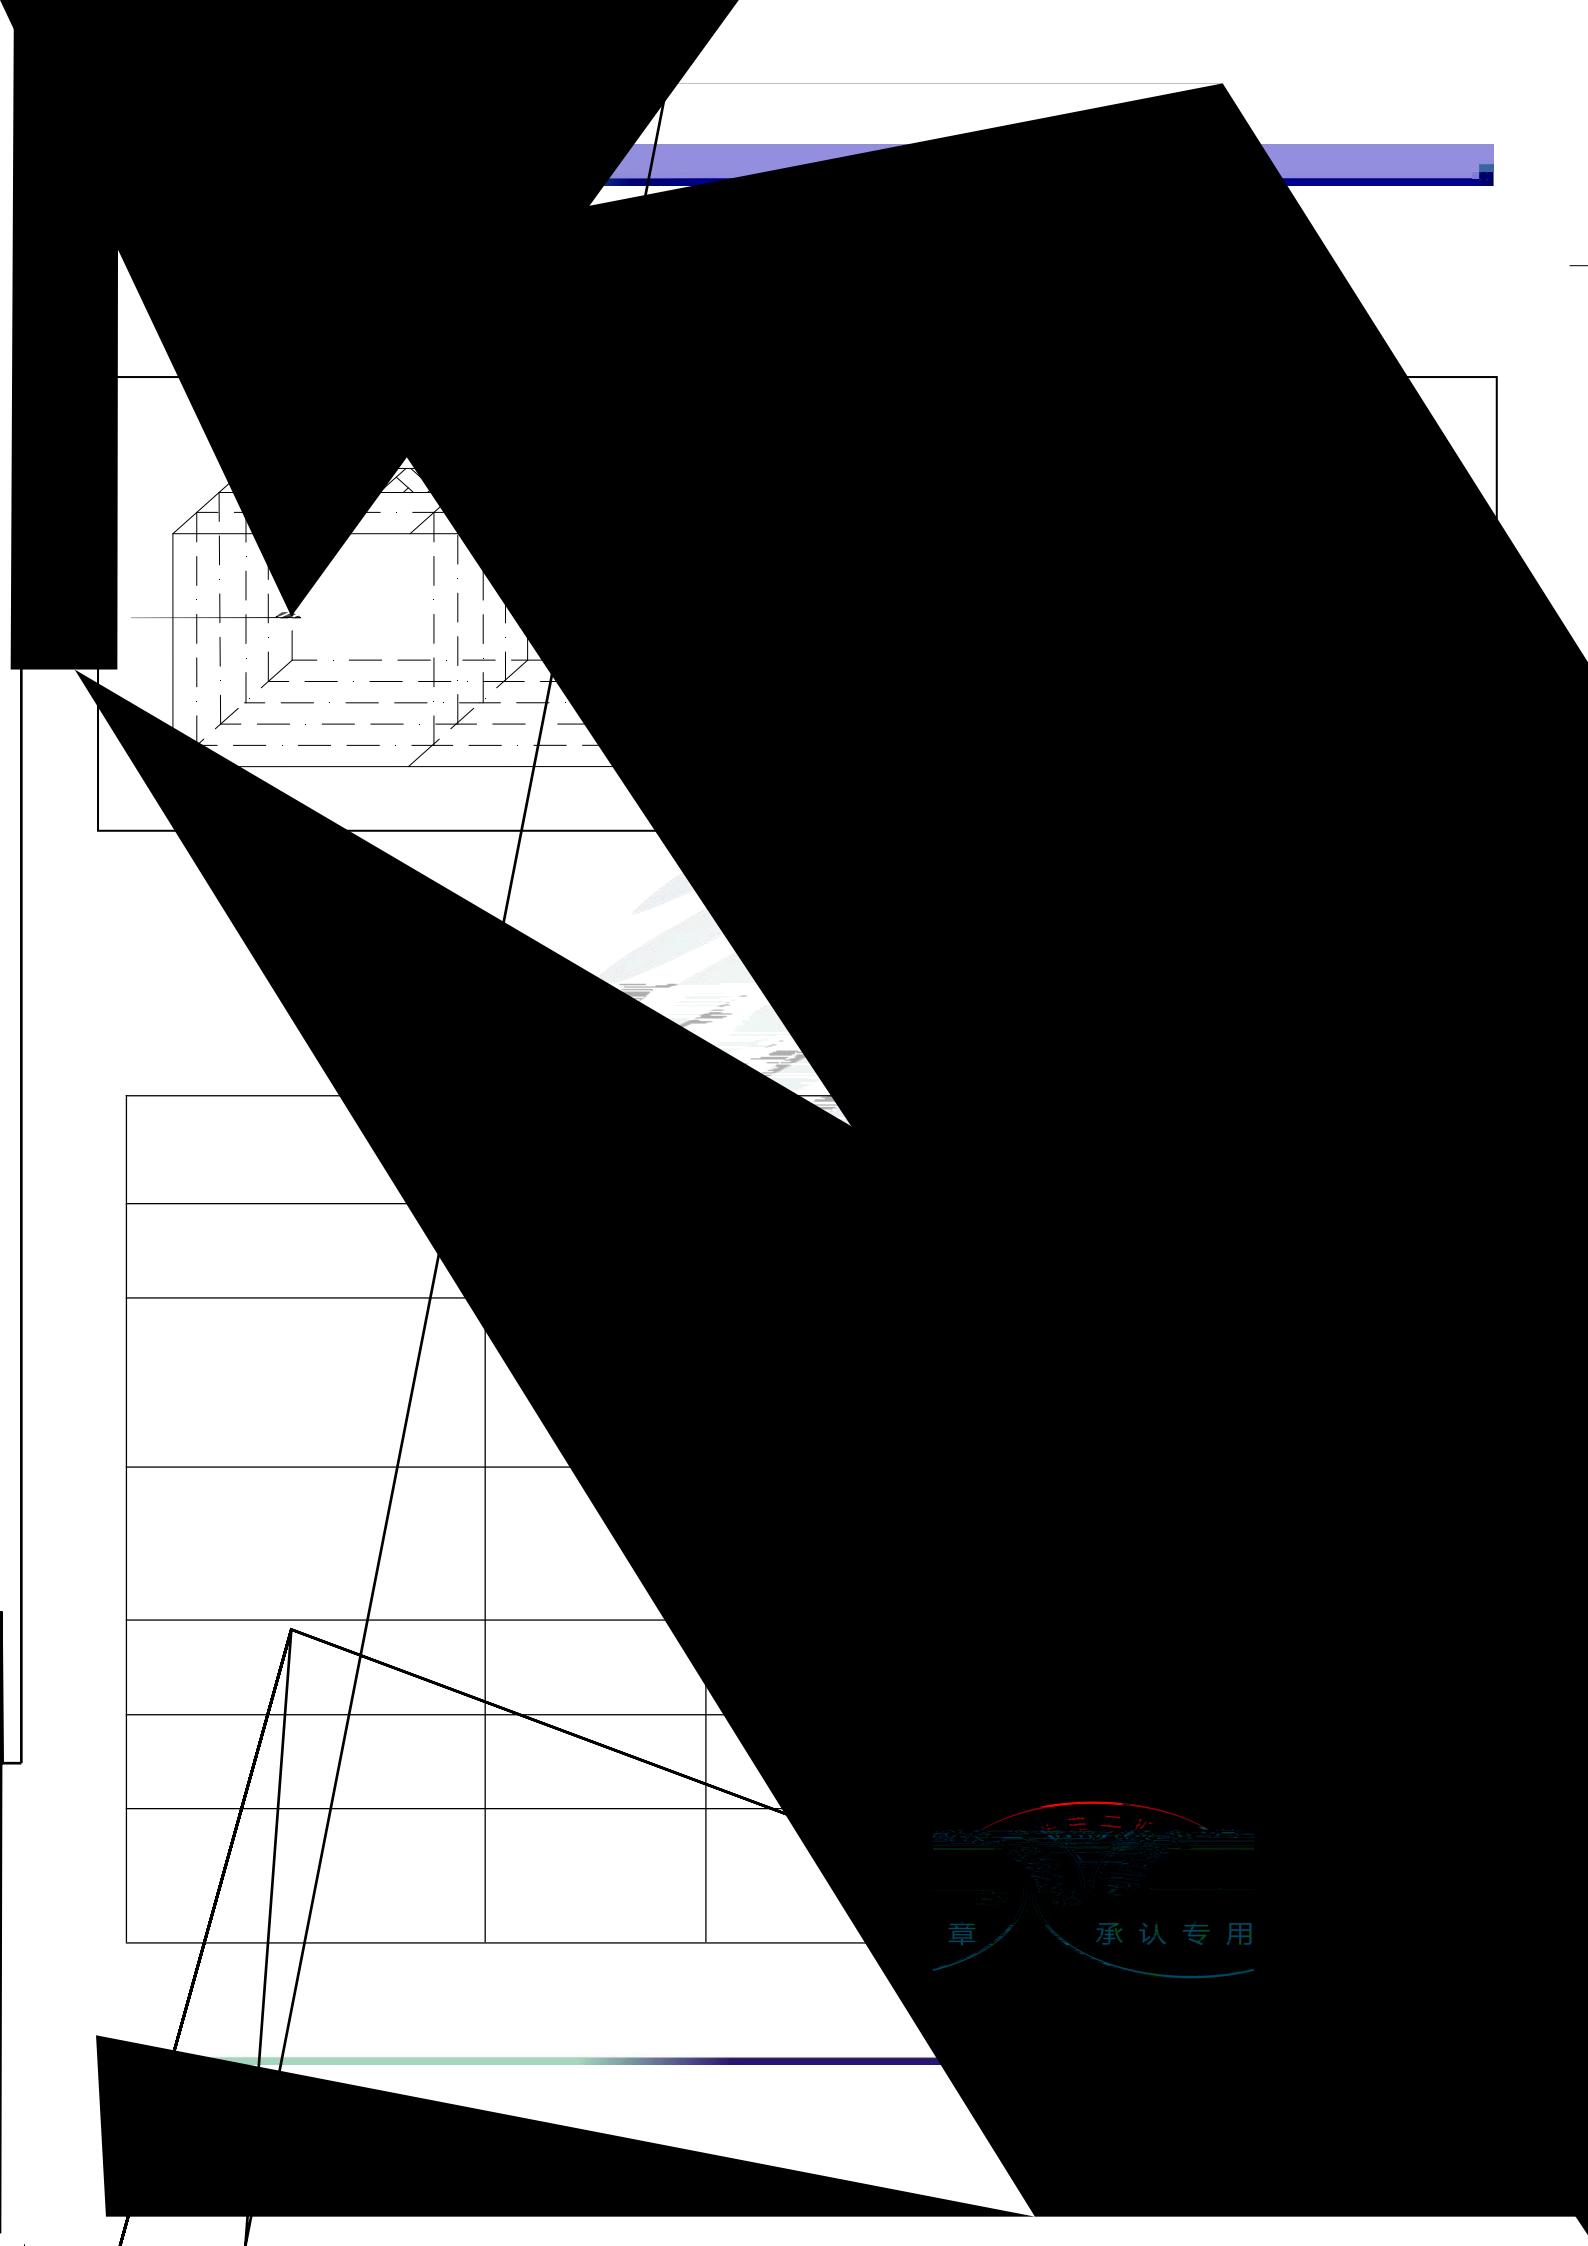



LED

/ LED





n[.


300

3

LED




PCB



LED


100PPM

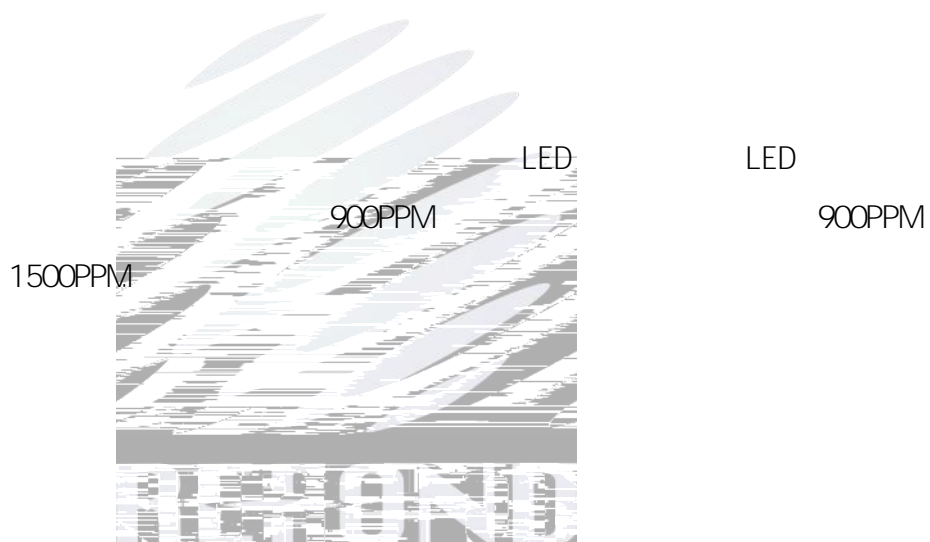

LED
LED

LED

LED

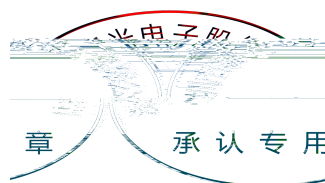

LED


LED

LED

		±		

±

60± 5



LED

