


SPECIFICATION



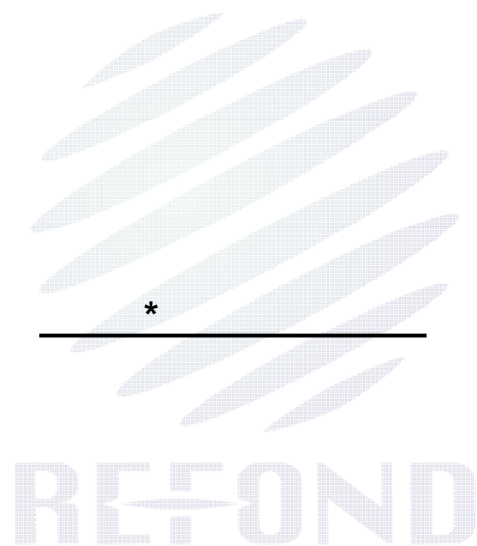


3
3
3
3
4
4
5
7
9
13
13

14
14
15
16
17
17
19
19

1. Description

1.1

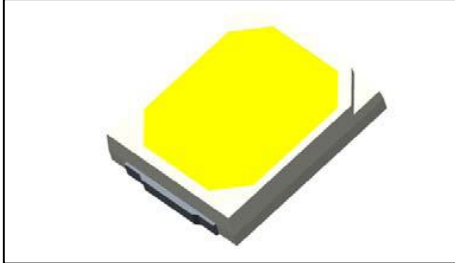



1.2 Features



1.3 Application

1.4 Product Selection Table



1.5 Package Dimension

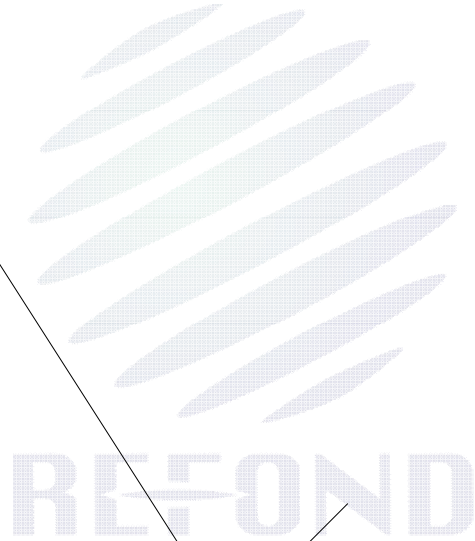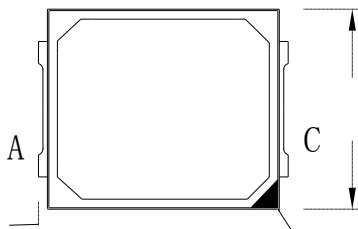

1.6 Product Parameters







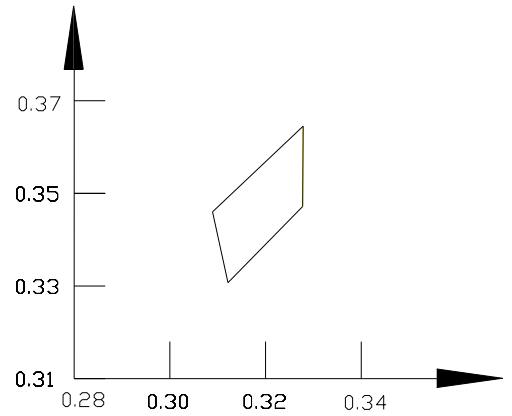
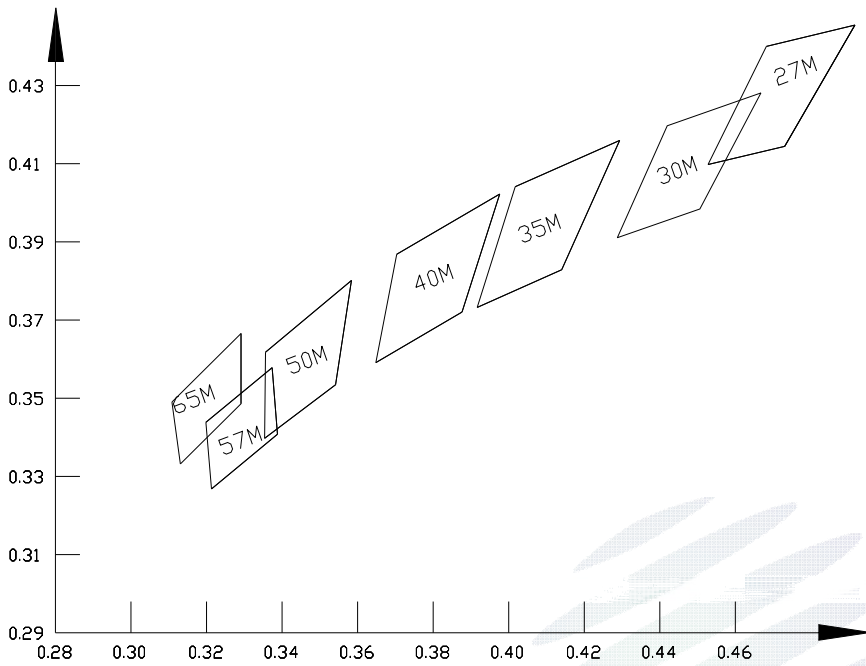




ERP 7-step


BIN CODE	X1	Y1	X2	Y2	X3	Y3	X4	Y4
27M	0.4528	0.4098	0.4731	0.4144	0.4916	0.4455	0.4682	0.4400
30M								
35M	0.4017	0.4041	0.4294	0.4160	0.4140	0.3829	0.3917	0.3732
40M	0.3704	0.3868	0.3976	0.4022	0.3876	0.3721	0.3648	0.3591
50M	0.3356	0.3618	0.3584	0.3801	0.3542	0.3535	0.3354	0.3397
57M	0.3198	0.3438	0.3374	0.3578	0.3388	0.3408	0.3213	0.3268
65N	0.3121	0.3307	0.3277	0.3472	0.3279	0.3645	0.3089	0.3460
65M	0.3131	0.3332	0.3291	0.3486	0.3291	0.3666	0.3108	0.3490

1.8 Typical optical characteristics curves

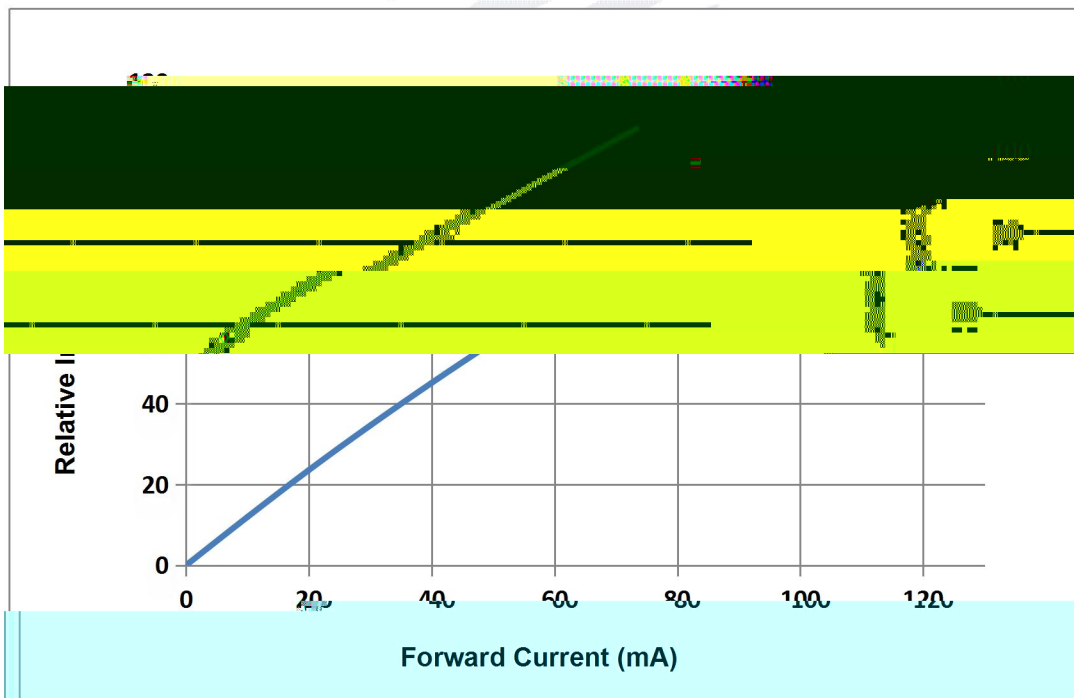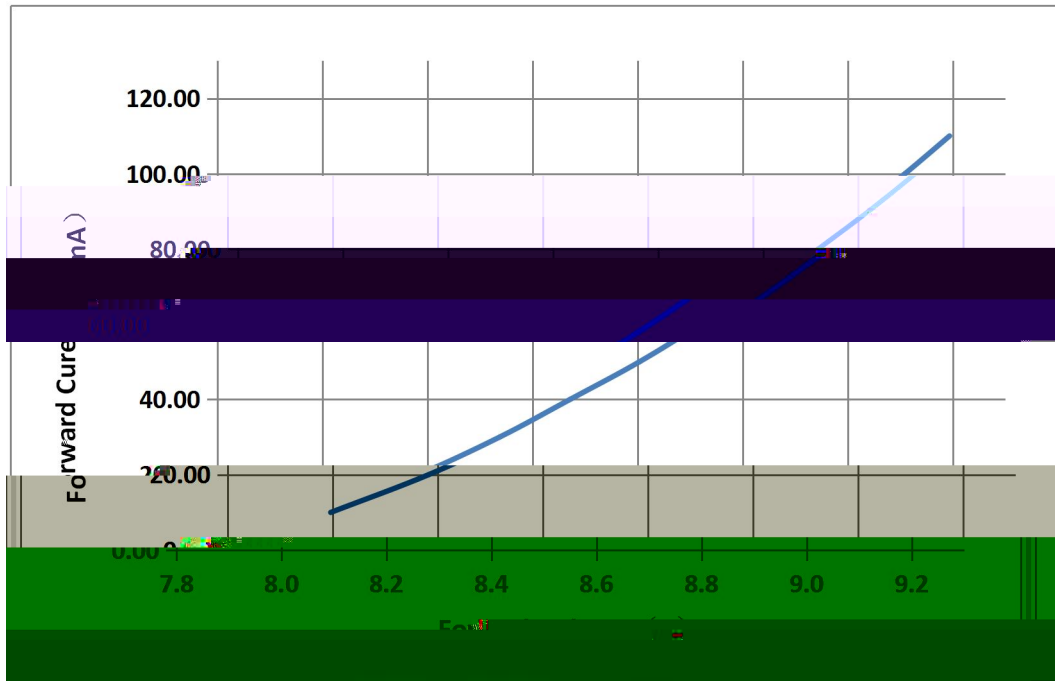

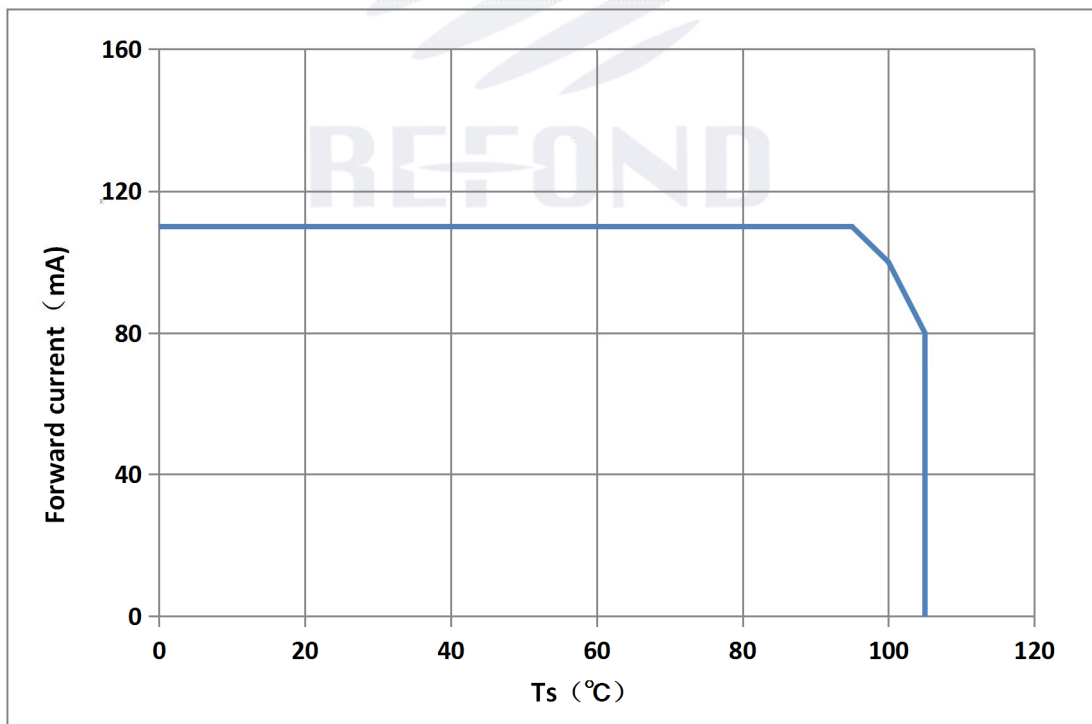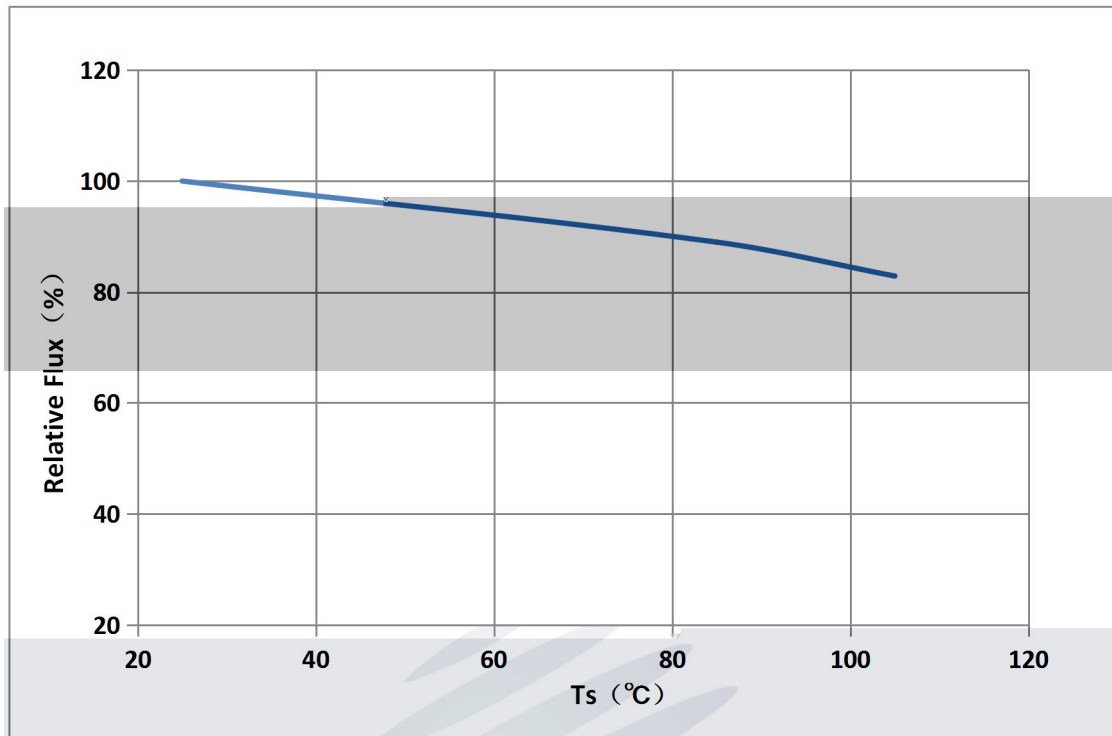


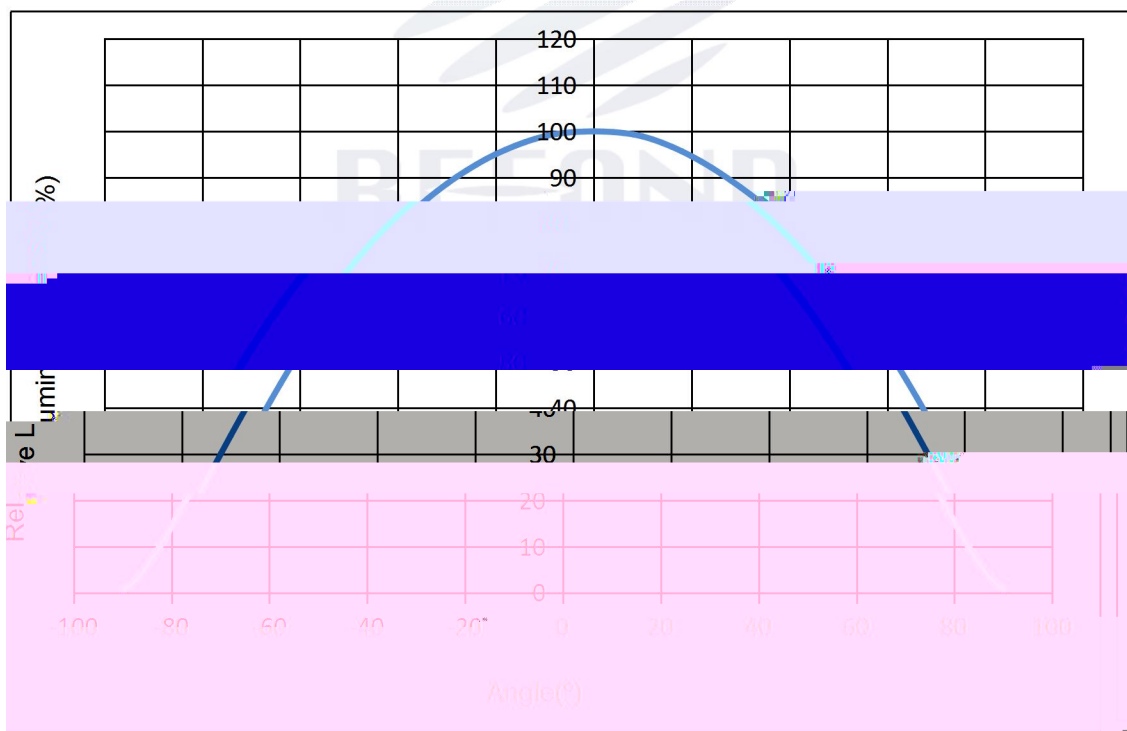
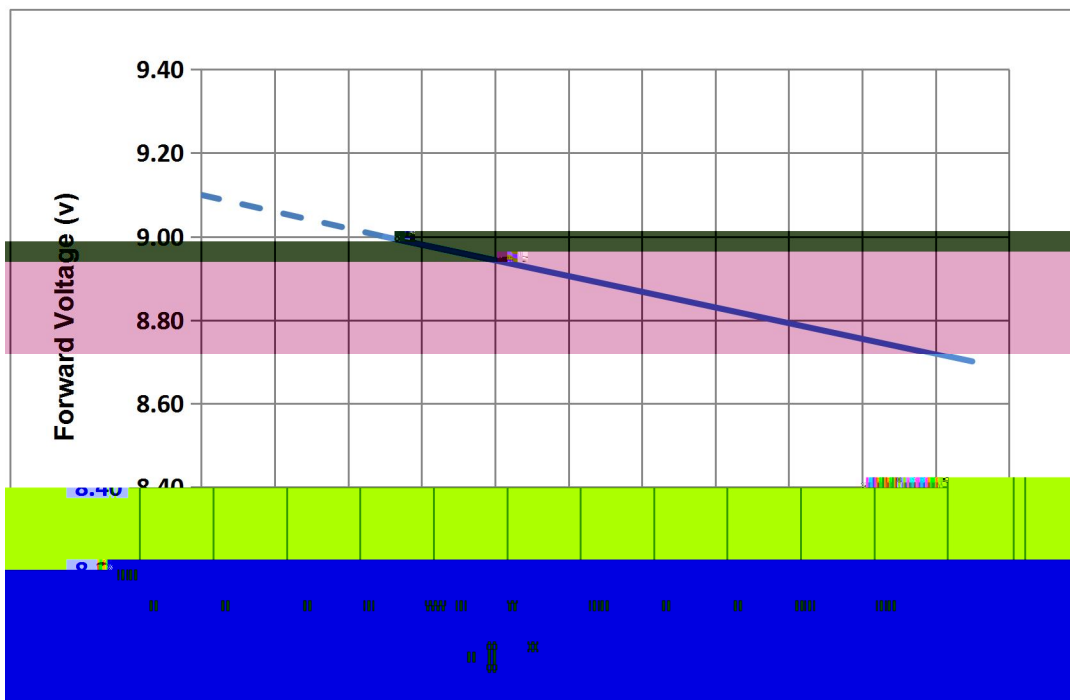


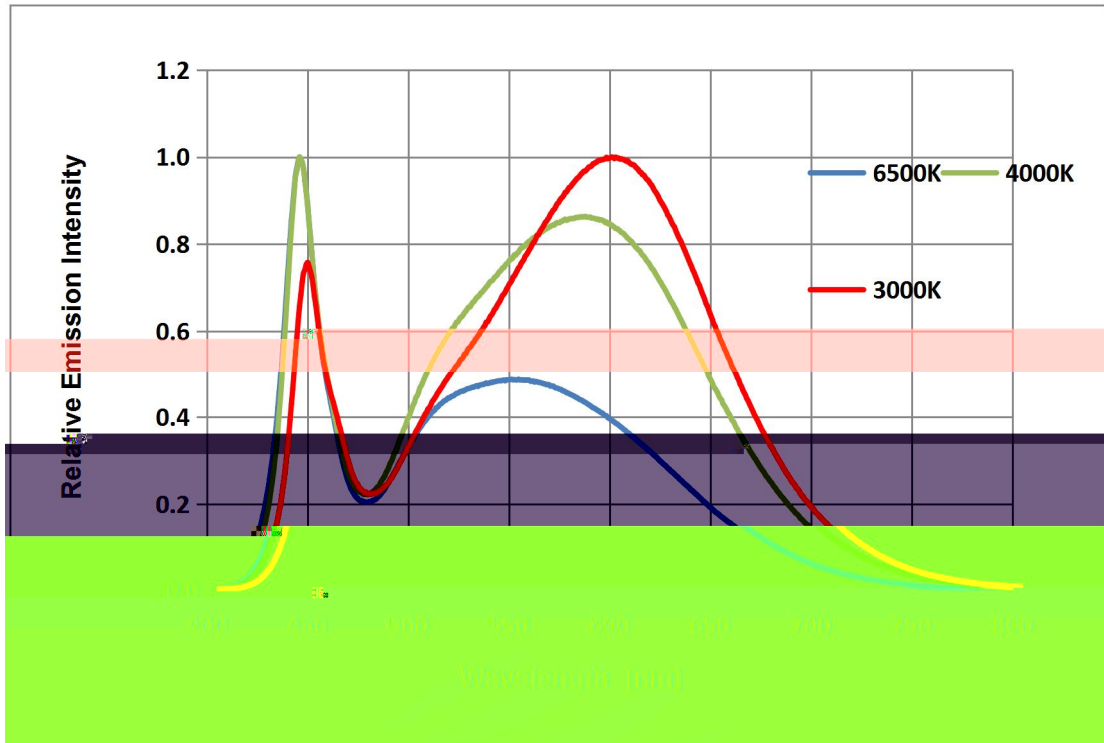

2. Packaging


2.1 Packaging Specification

12000pcs

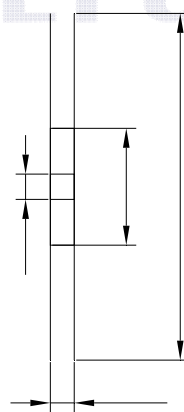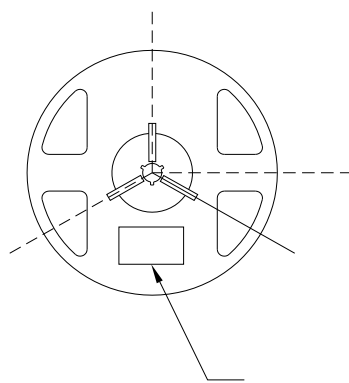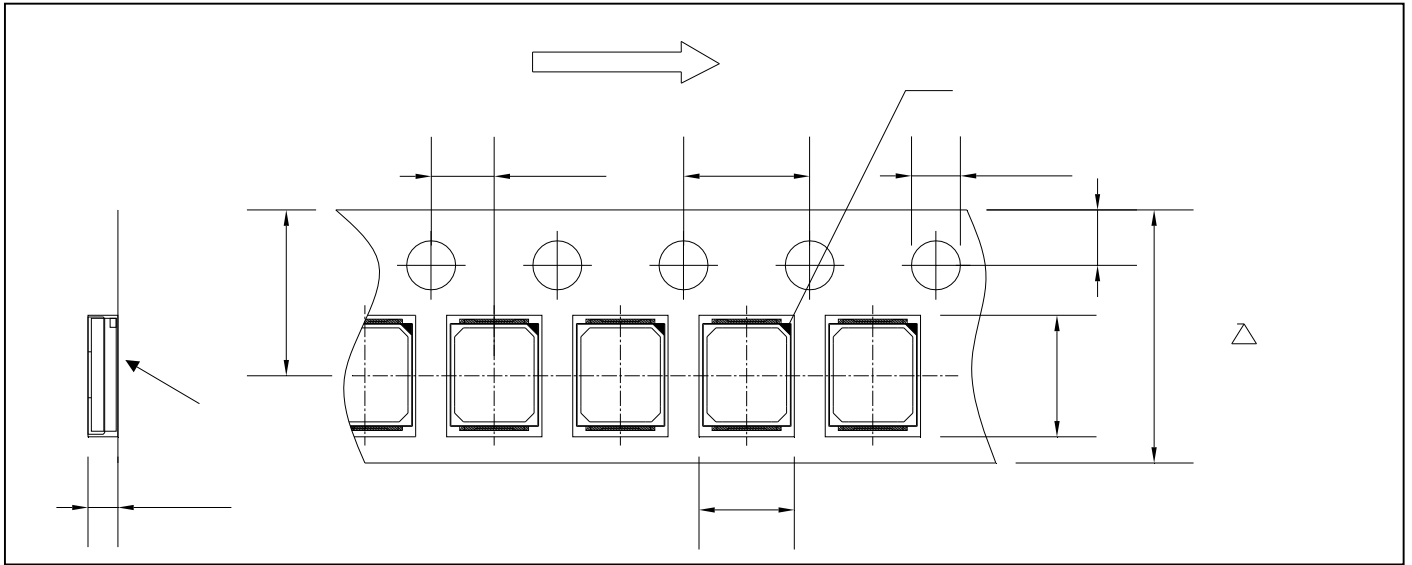


PART NO:		
SPEC NO:		
LOT NO:		
BIN CODE:		
Φ:	XY:	
VF:	WLD:	
	QTY:	
	DATE:	

2.2 Moisture Resistant Packing

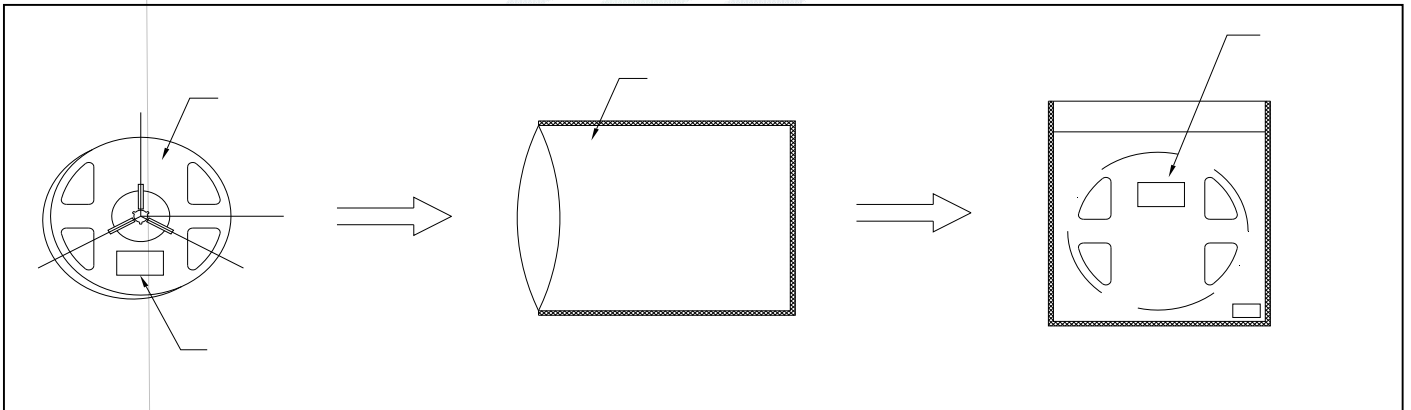

2.3 Cardboard Box

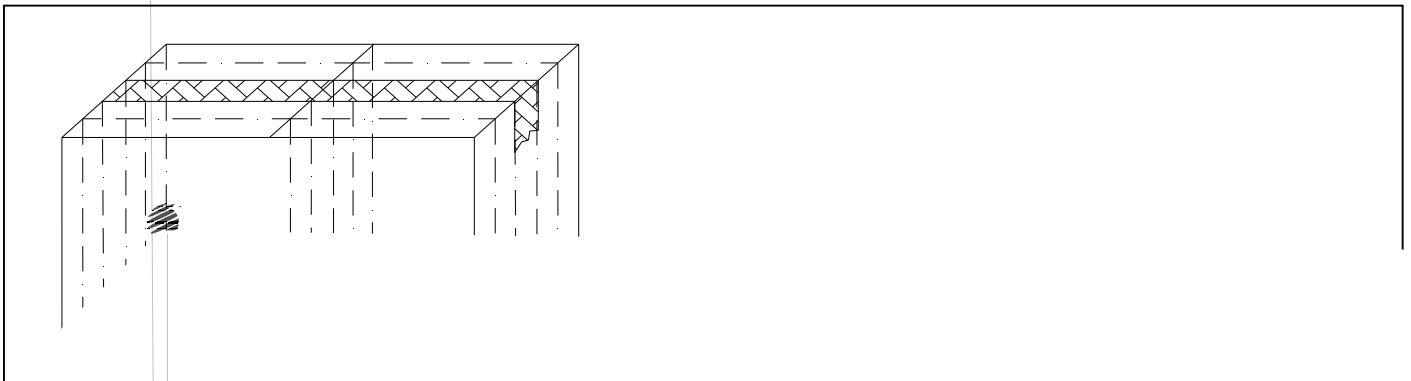

2.5 Criteria For Judging Damage





REFOND



4. Handling Precautions

4.1 Handling Precautions





REFOND



