



SPECIFICATION



.....	3
General Description	3
.....	3
.....	3
.....	4
.....	5
.....	7
.....	8
.....	11
.....	11
.....	12
.....	13
.....	14
.....	15
.....	15
.....	17
.....	17




1. Description


1.1

1.2 Features


1.3 Application



1.4 Package Dimension

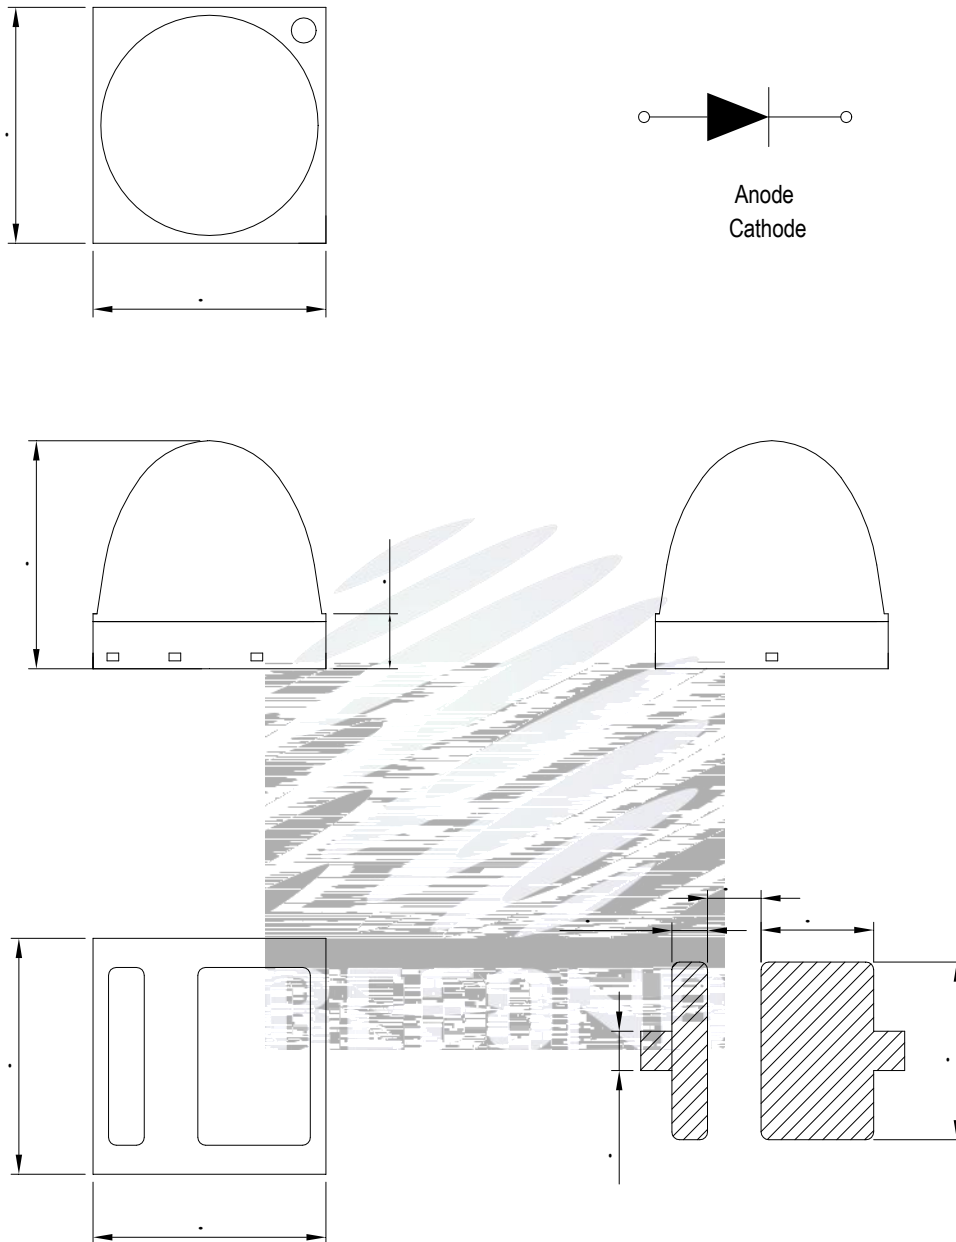

±




1.5 Product Parameters





1.6 Bin Range Of Forward Voltage and Luminous Flux (IF=350mA)

BIN (IF=350mA)

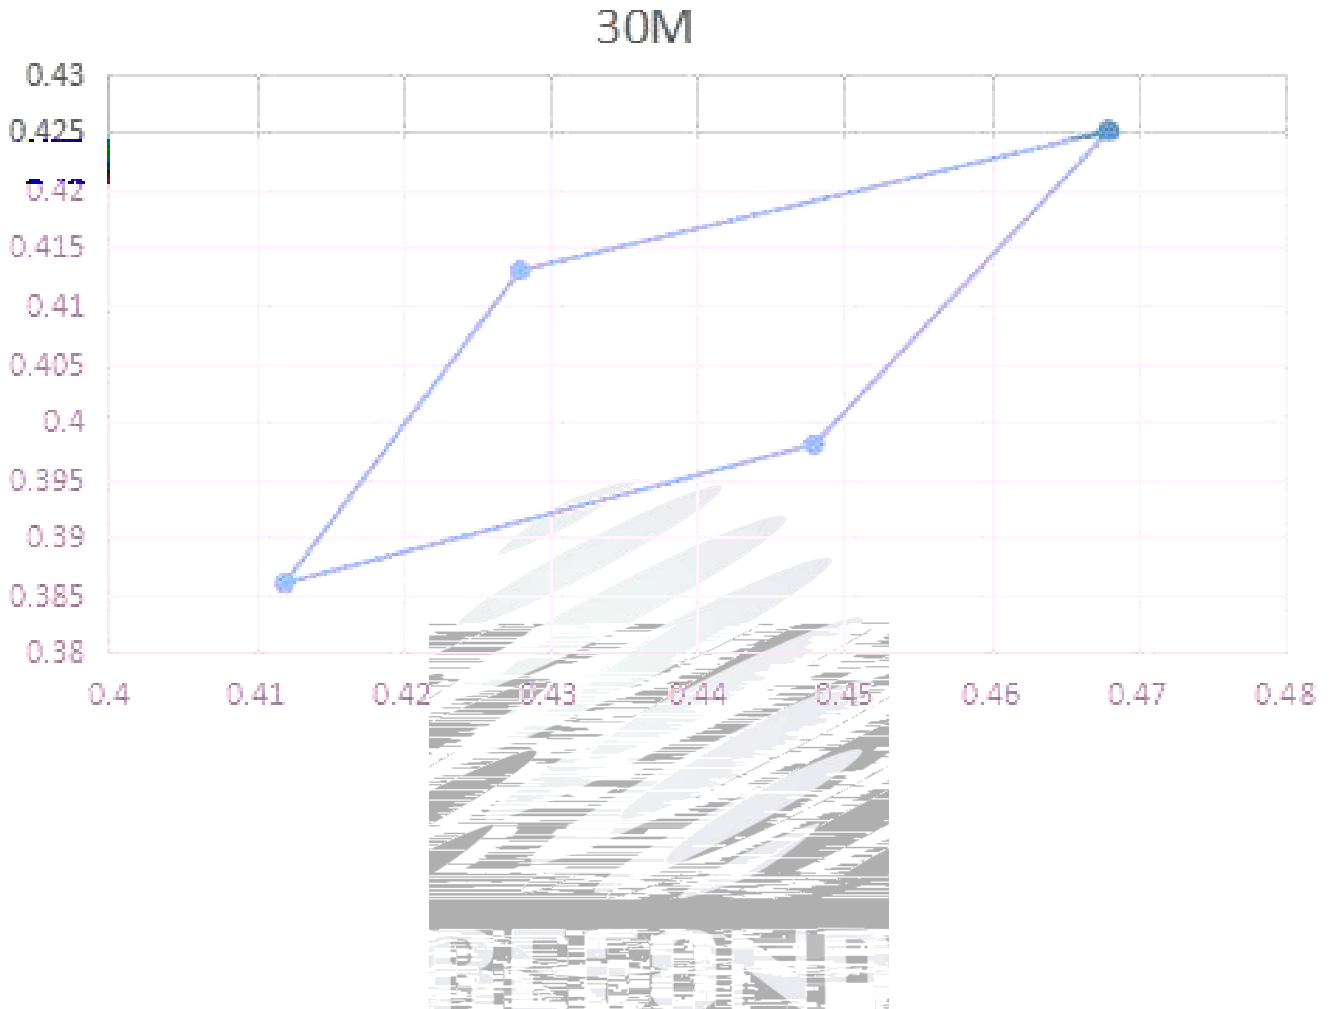


Bin data





Bin Code	X1	Y1	X2	Y2	X3	Y3	X4	Y4
30M	0.468	0.425	0.428	0.413	0.412	0.386	0.448	0.398




兴中光电
承认专用章

1.7 Typical Optical Characteristics Curves

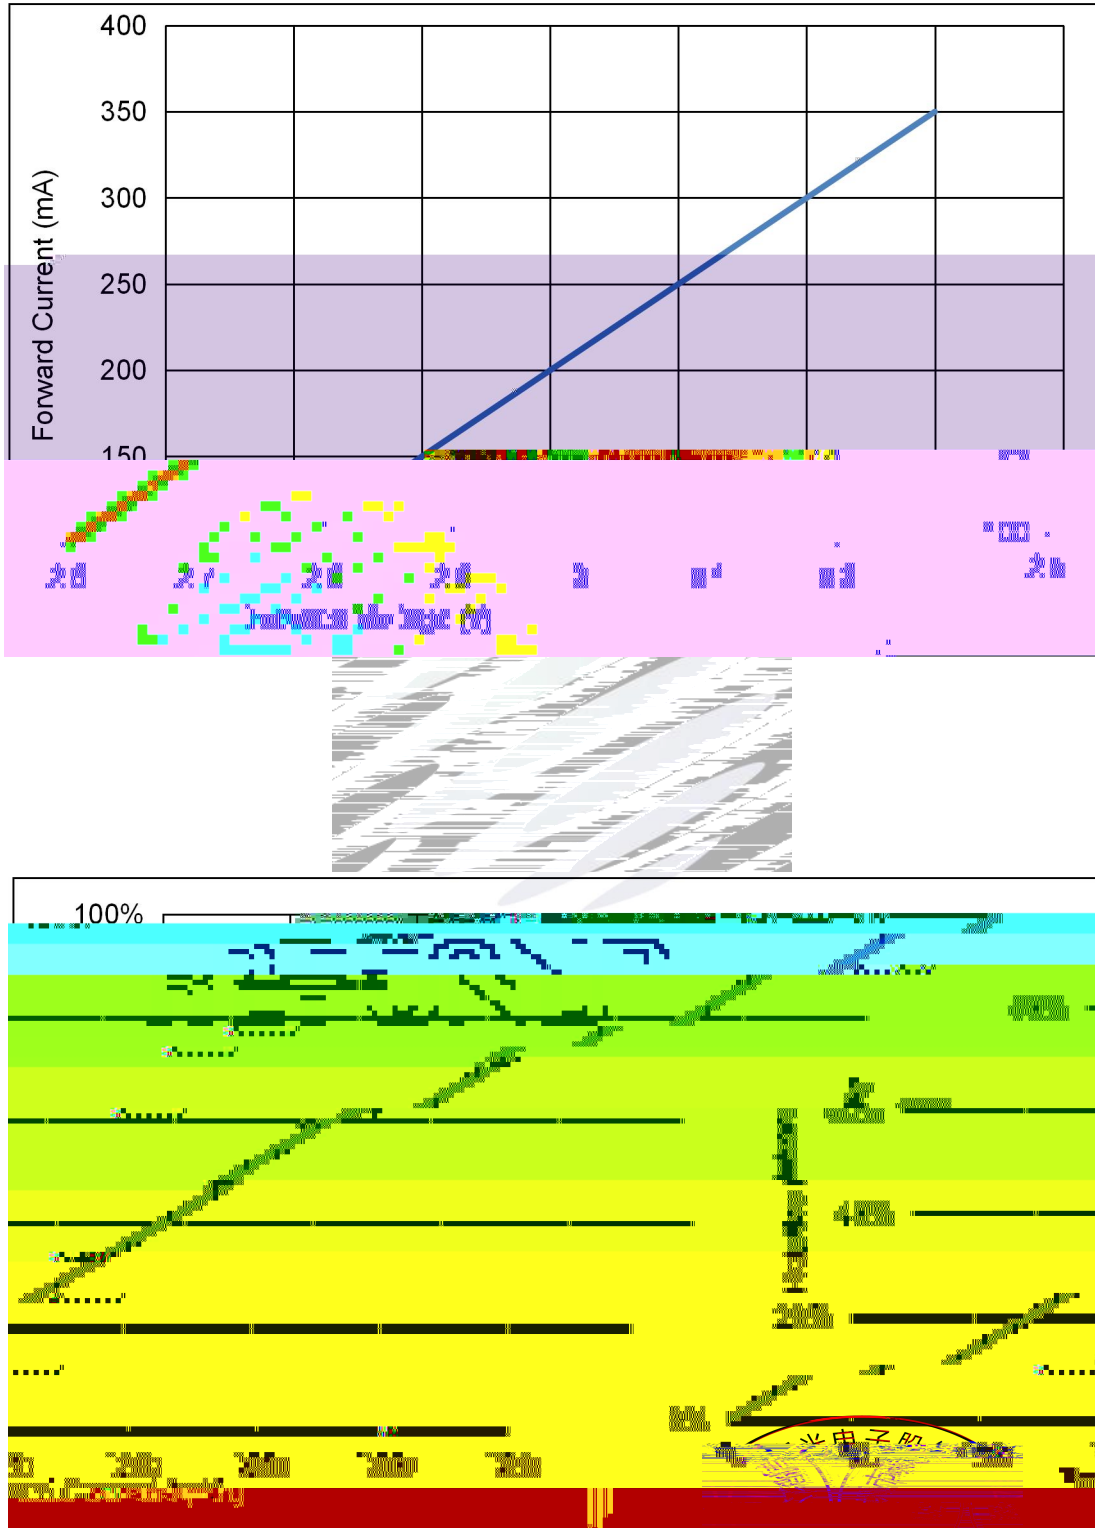

承认专用章

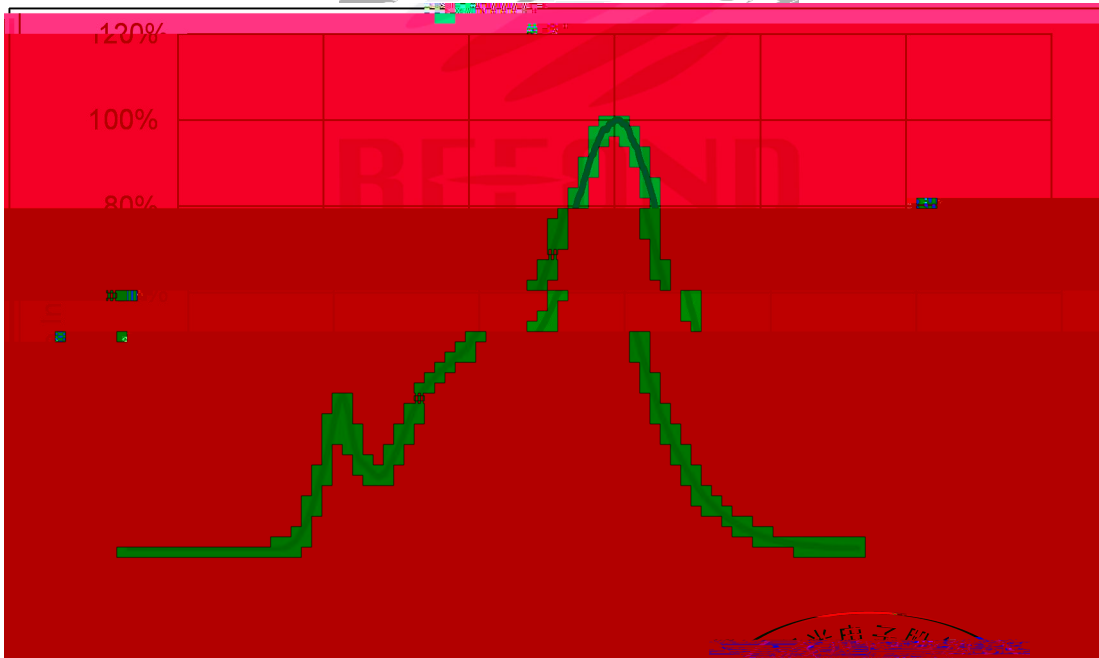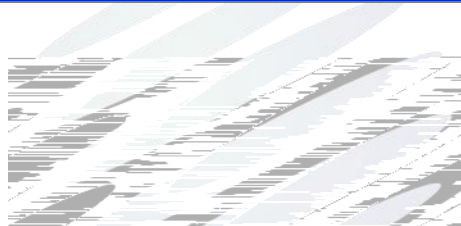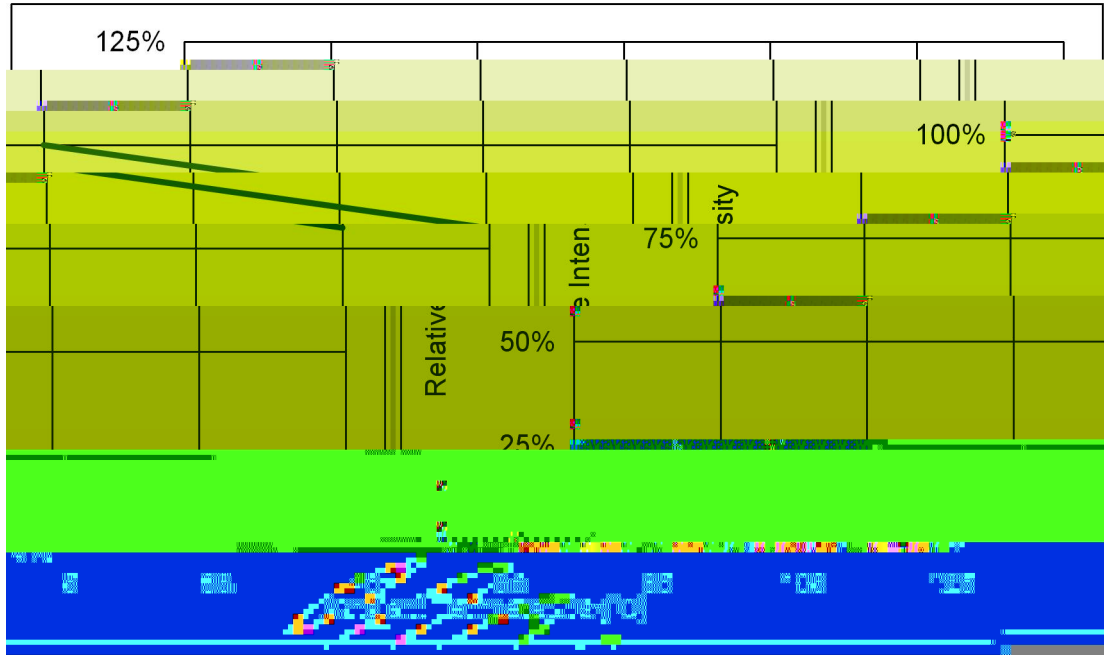


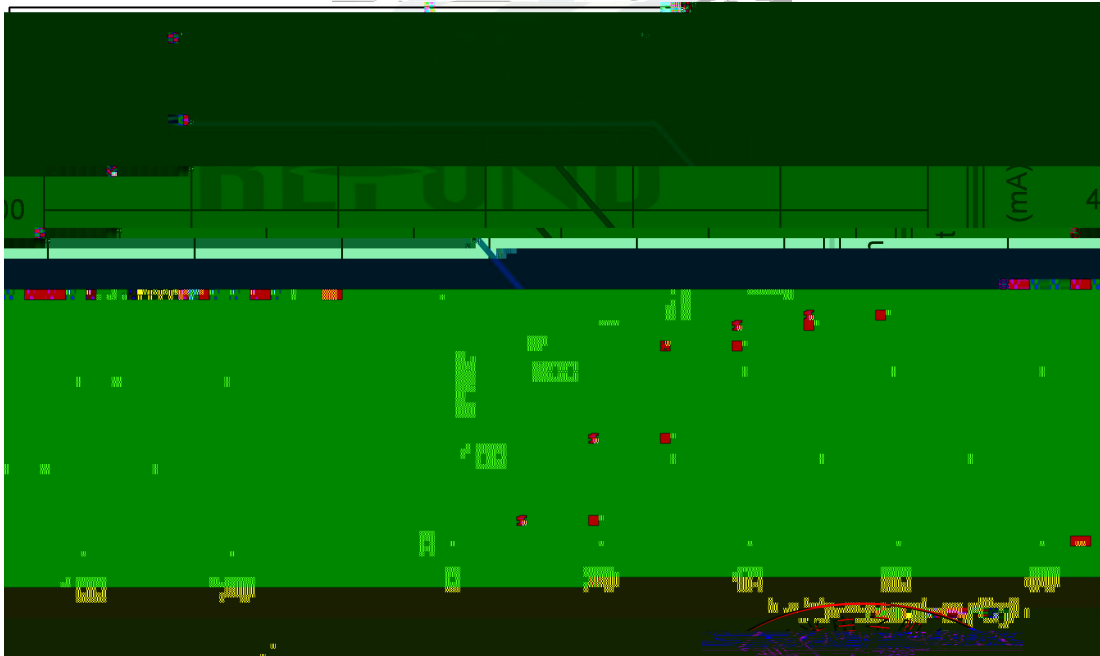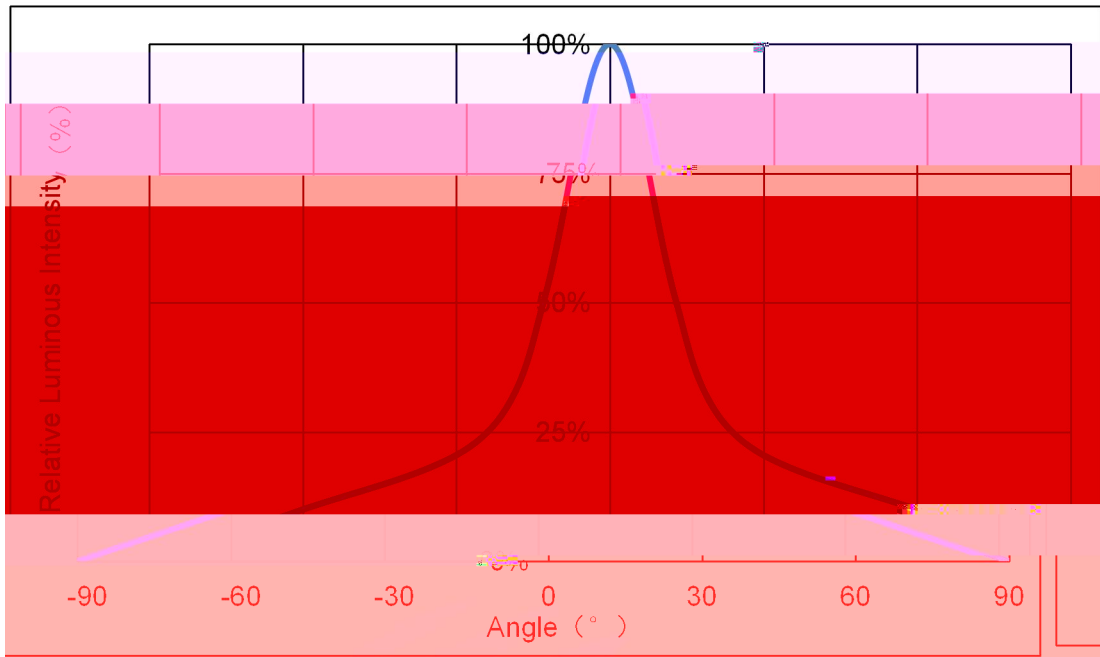

2. Packaging


2.1 Packaging Specification

2500

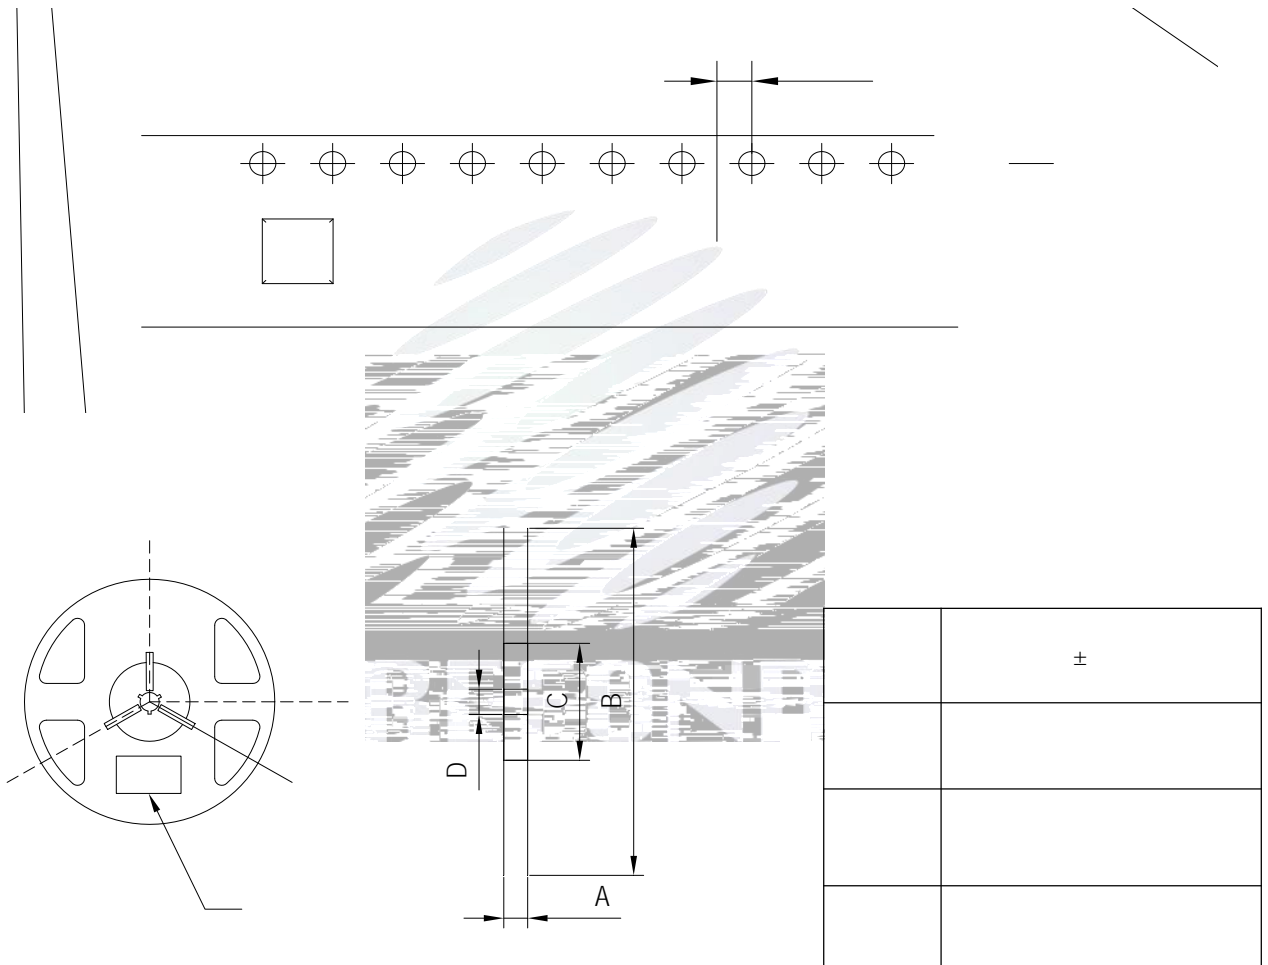



2.4 Reliability Test Items And Conditions



2.5 Criteria For Judging Damage

Luminous Flux				




°C

(2)



(1)



4. Handling Precautions

4.1 Handling Precautions

