

SPECIFICATION

REFOND P/N

RF-W*HV32DS-EF-G2


REFOND
Mass Product

Contents

1. Description	3
1.1 General Description	3
1.2 Features	3
1.3 Application	3
1.4 Product Selection Table	4
1.5 Package Dimension	4
1.6 Product Parameters	5
1.7 Bin Range Of Forward Voltage and Luminous Flux (IF=50mA)	BIN
(IF=50mA)	7
1.8 Typical optical characteristics curves	9
2. Packaging	13
2.1 Packaging Specification	13
2.1.1 Carrier Tape Dimension	
2.1.2 Reel Dimension	
2.1.3 Label Form Specification	
2.2 Moisture Resistant Packing	14
2.3 Cardboard Box	14
2.4 Reliability Test Items And Conditions	15
2.5 Criteria For Judging Damage	16
3. SMT Reflow Soldering Instructions SMT	17
3.1 SMT Reflow Soldering Instructions SMT	17
4. Handling Precautions	19
4.1 Handling Precautions	19

1. Description

1.1

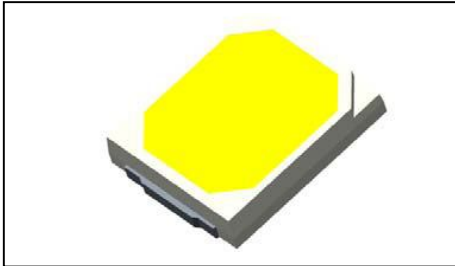

The White LED which was fabricated using a blue chip and the phosphor.

Size:2.8mmX3.5mmX0.7mm.

LED

2.8mmX3.5mmX0.7mm

1.2 Features

PLCC-2 Package.

Extremely wide viewing angle.

Suitable for all SMT assembly and solder process.

Available on tape and reel.

Moisture sensitivity level: Level 3.

Level 3

RoHS compliant. RoHS

SMT

1.3 Application

Indoor lighting.

Bulb lighting.

General indoor applications.

1.4 Product Selection Table

Modle NO.	CCT	Center		
		code	x	y
RF-W3HV32DS-EF-G2	3000K	30M	0.4400	0.4030
RF-W4HV32DS-EF-G2	4000K	40M	0.3800	0.3800
RF-W6HV32DS-EF-G2	6500K	65M	0.3205	0.3493

1.5 Package Dimension

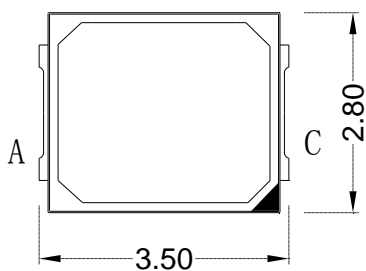


Fig.1-1 Top view




Fig.1-2 Side view

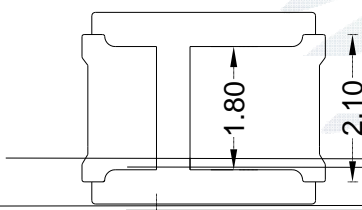


Fig.1-3 Bottom view

Fig.1-4 Polarity

Fig.1-5 Soldering patterns

Notes

All dimensions units are millimeters.

All dimensions tolerances are 0.05mm unless otherwise noted.

1.6 Product Parameters

Table 1-1 Electrical / Optical Characteristics at Ts=25°C

Item	Code	Symbol	Test Condition	RF - Value			
				Min.	Max.	Typ.	unit
Forward Voltage	Rank U3	V_F	$I_F = 50\text{mA}$	17.4	17.8	18	V
	Rank VW3			17.8	18.2		V
	Rank W3			18.2	18.6		V
	Rank X3			18.6	19.0		V
RF-W3HV32DS-EF-G2	Rank FC2		$I_F = 50\text{mA}$	100	110	117	lm
	Rank FC3			110	120		lm
	Rank FC4			120	130		lm
RF-W4HV32DS-EF-G2	Rank FC3		$I_F = 50\text{mA}$	110	120	125	lm
	Rank FC4			120	130		lm
	Rank FC5			130	140		lm
RF-W6HV32DS-EF-G2	Rank FC3		$I_F = 50\text{mA}$	110	120	125	lm
	Rank FC4			120	130		lm
	Rank FC5			130	140		lm
Reverse Current		I_R	$V_R = 30\text{V}$	---	10	---	uA
Viewing Angle		$2\theta_{1/2}$	$I_F = 50\text{mA}$	---	---	120	Deg
Color Rendering Index		CRI		80	---	82	---
Thermal resistance		R_{THJ-S}		---	---	27	/W

Table 1-2 Absolute Maximum Ratings at Ts=25°C

Parameter	Symbol	Rating	Units
Power Dissipation	P _D	1140	mW
Forward Current	I _F	60	mA
Peak Forward Current	I _{FP}	100	mA
Reverse Voltage	V _R	30	V
Electrostatic Discharge(HBM)	ESD	2000	V
Operating Temperature	T _{OPR}	-40 ~ +105	
Storage Temperature	T _{STG}	-40 ~ +105	
Junction Temperature	T _J	125	

Notes


- 1/10 Duty cycle, 0.1ms pulse width.
- The above forward voltage measurement allowance tolerance is $\pm 0.2V$.
- The above color coordinates measurement allowance tolerance is ± 0.005 . ± 0.005 .
- The above luminous intensity measurement allowance tolerance $\pm 10\%$.
- Care is to be taken that power dissipation does not exceed the absolute maximum rating of the product.
- All measurements were made under the standardized environment of Refond.
- When the LEDs are in operation the maximum current should be decided after measuring the package temperature junction temperature should not exceed the maximum rate
- ESD yield is over 90% at 2000V ESD (HBM). ESD protection during products handing is needed.

1.7 Bin Range Of Forward Voltage and Luminous Flux (IF=50mA)

BIN (IF=50mA)

Table 1-3

VF V	U3	VW3	W3	X3
		17.4-17.8	17.8-18.2	18.2-18.6
Im RF-W3HV32DS-EF-G2	FC2	FC3	FC4	
	100-110	110-120	120-130	
Im RF-W4HV32DS-EF-G2	FC3	FC4	FC5	
	110-120	120-130	130-140	
Im RF-W6HV32DS-EF-G2	FC3	FC4	FC5	
	110-120	120-130	130-140	

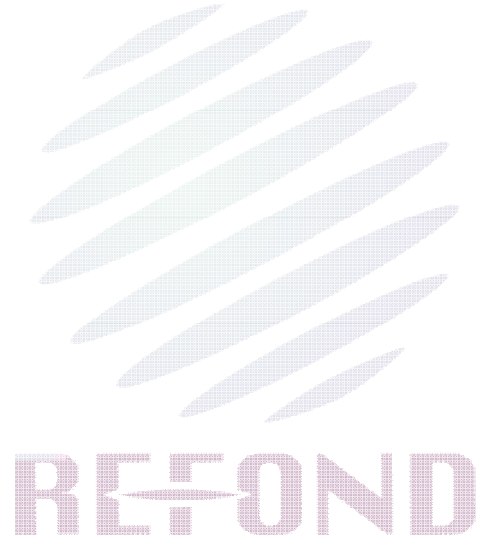

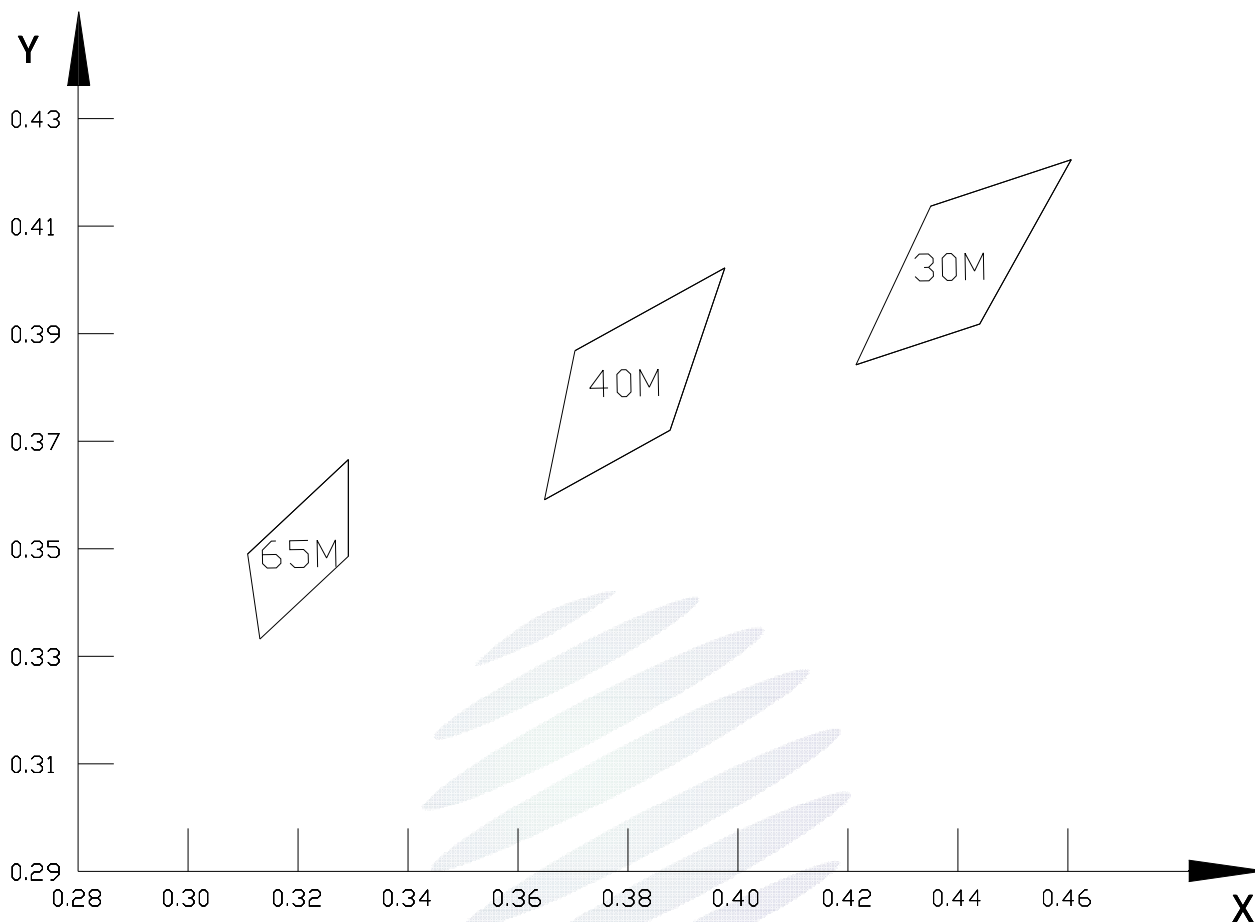


Fig 1-6 The C.I.E Chromaticity Diagram CIE



Table 1-4

6-step								
BIN CODE	X1	Y1	X2	Y2	X3	Y3	X4	Y4
30M	0.4351	0.4137	0.4606	0.4224	0.4440	0.3918	0.4215	0.3842
40M	0.3704	0.3868	0.3976	0.4022	0.3876	0.3721	0.3648	0.3591
65M	0.3131	0.3332	0.3291	0.3486	0.3291	0.3666	0.3108	0.3490

1.8 Typical optical characteristics curves

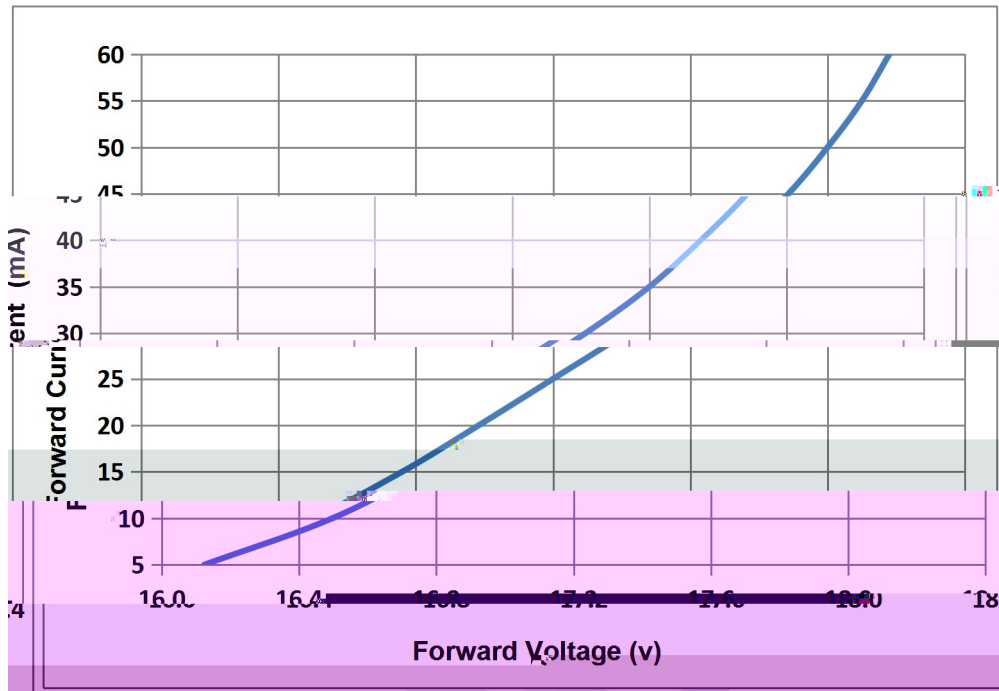


Fig 1-7 Forward Voltage Vs. Forward Current

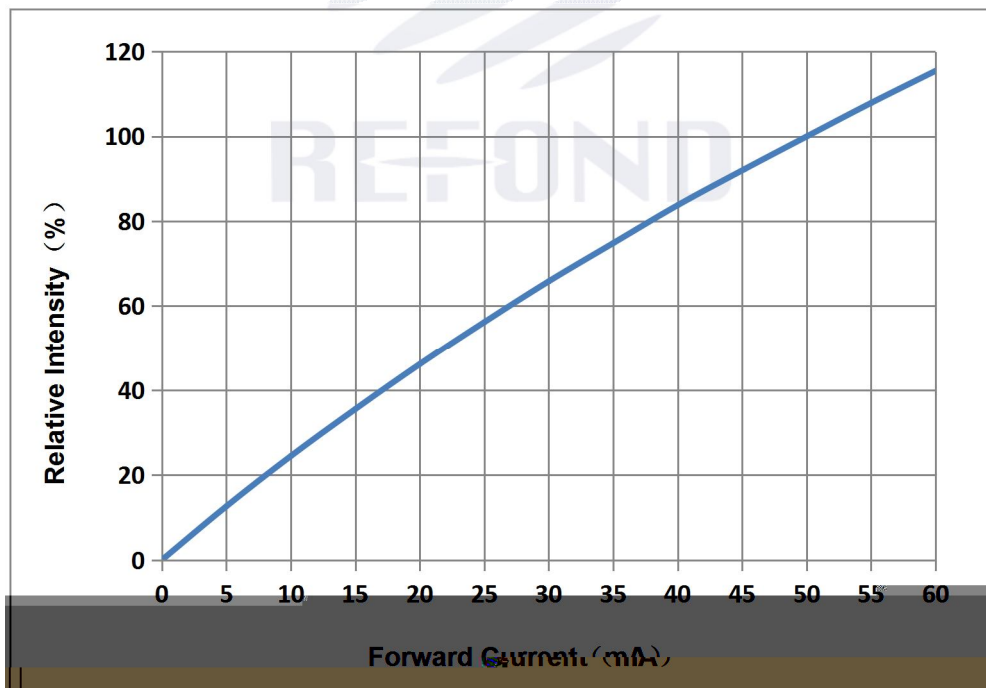


Fig 1-8 Forward Current Vs. Relative Intensity

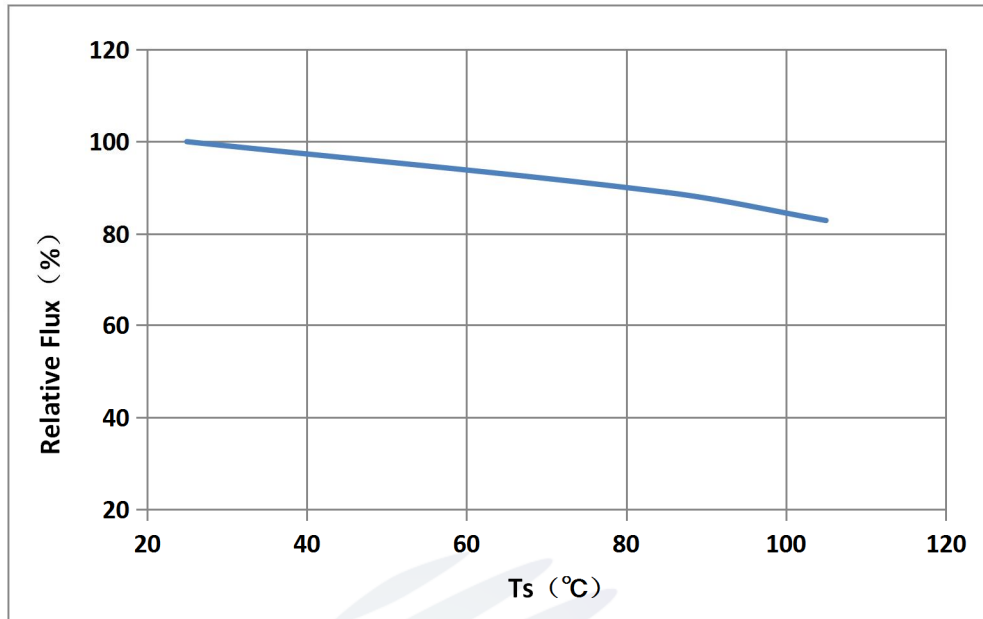


Fig 1-9 Solder Temperature Vs Relative Intensity

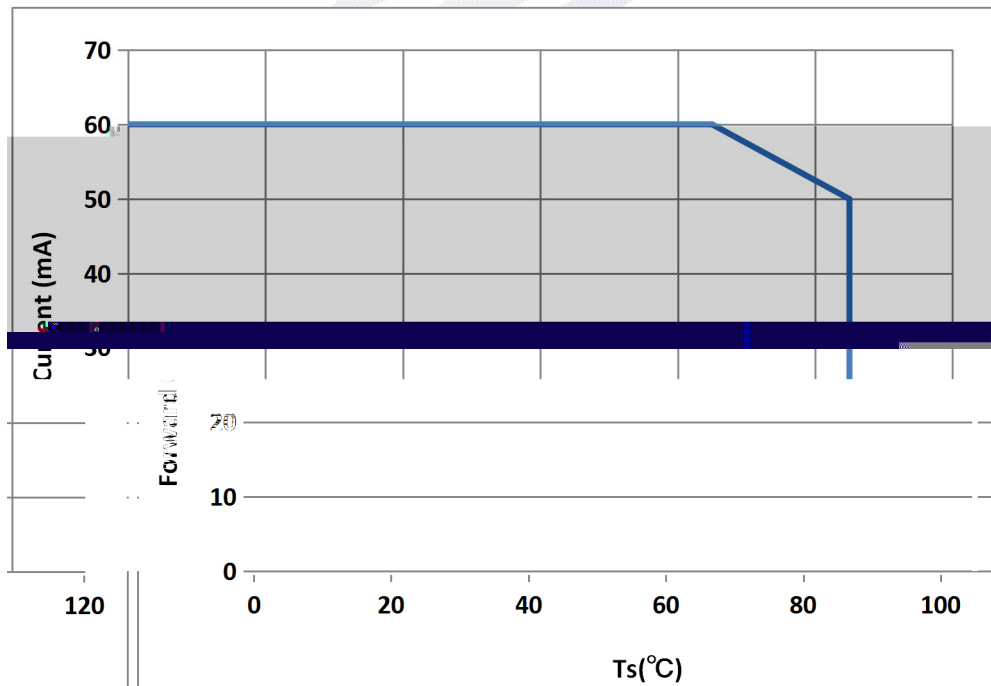


Fig 1-10 Solder Temperature Vs Forward Current

Tj 125

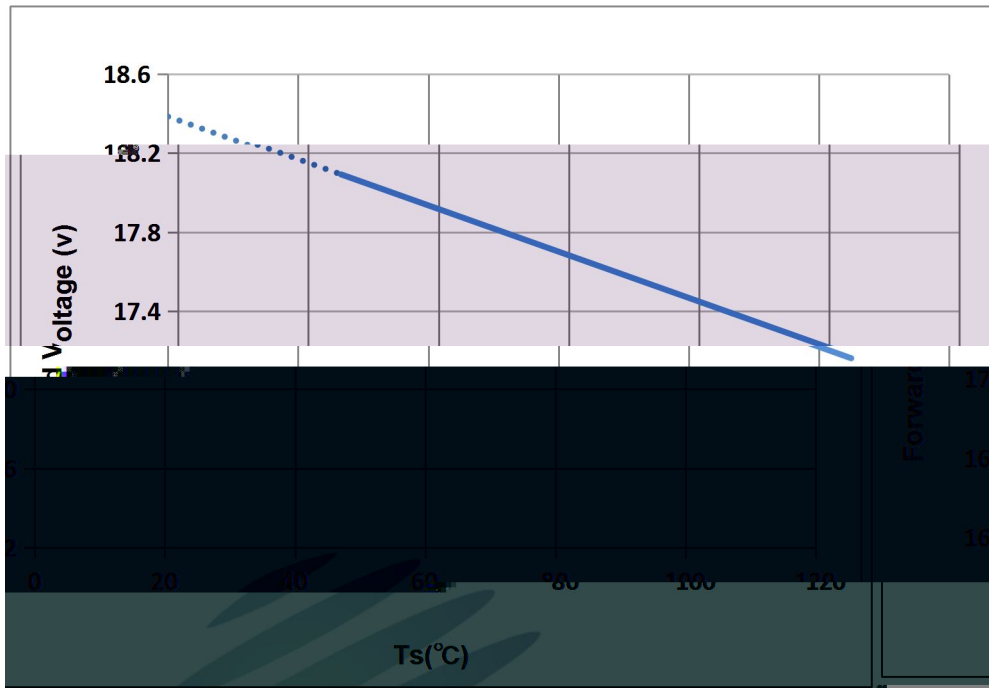


Fig 1-11 Forward Voltage Vs Solder Temperature

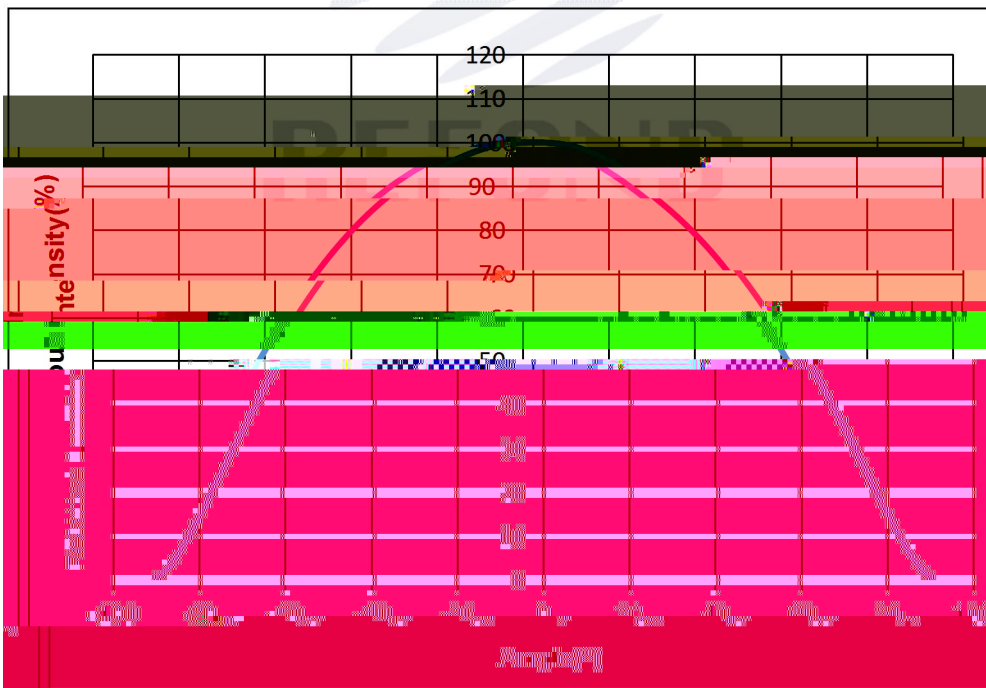


Fig 1-12 Radiation diagram

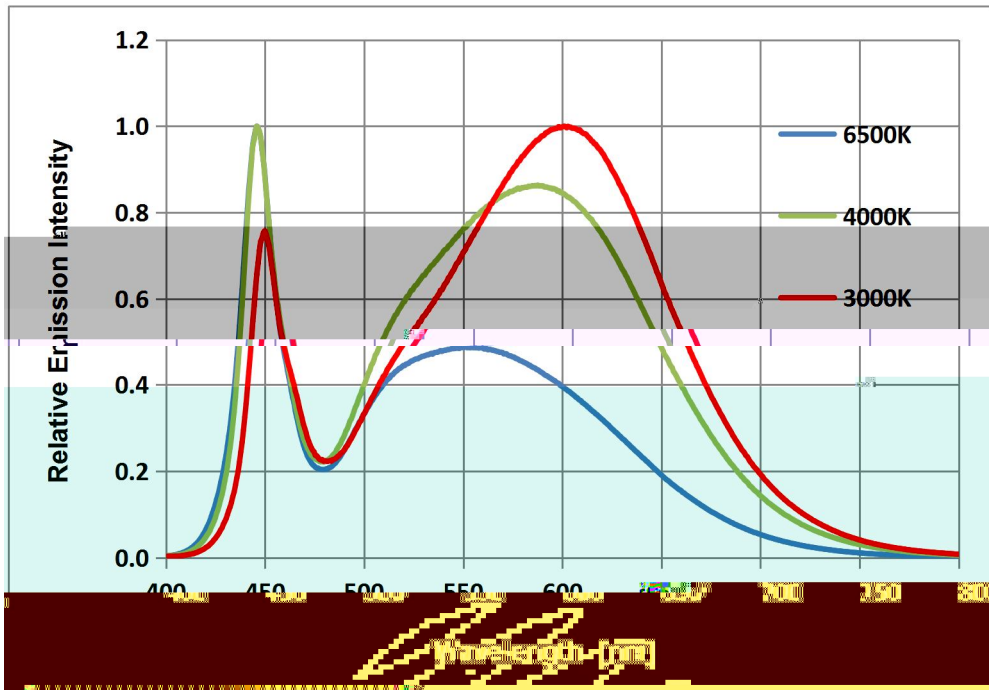


Fig 1-13 Spectrum Distribution

REFOND

2. Packaging

2.1 Packaging Specification

Package: 12000pcs/reel. 12000pcs

2.1.1 Carrier Tape Dimension



Fig.2-1 Carrier Tape Dimension

2.1.2 Reel Dimension


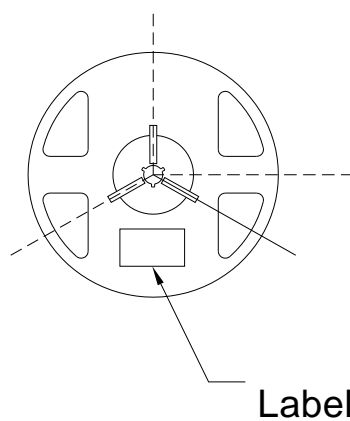


Fig.2-2 Title

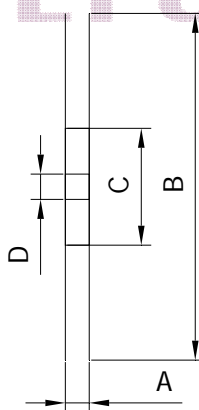

A	12.2 0.3mm
B	290 2mm
C	79.6 0.2mm
D	14.2 0.2mm

Notes

The tolerances unless mentioned ± 0.1 mm. Unit : mm ± 0.1

2.1.3 Label Form Specification



Fig 2-3 Title

PART NO.	Part Number
SPEC NO.	Spec Number
LOT NO.	Lot Number
BIN CODE	Bin Code
	Luminous flux
XY	Chromaticity Bin
V _F	Forward Voltage
WLD	Wavelength
QTY	Packing Quantity
DATE	Made Date

2.2 Moisture Resistant Packing

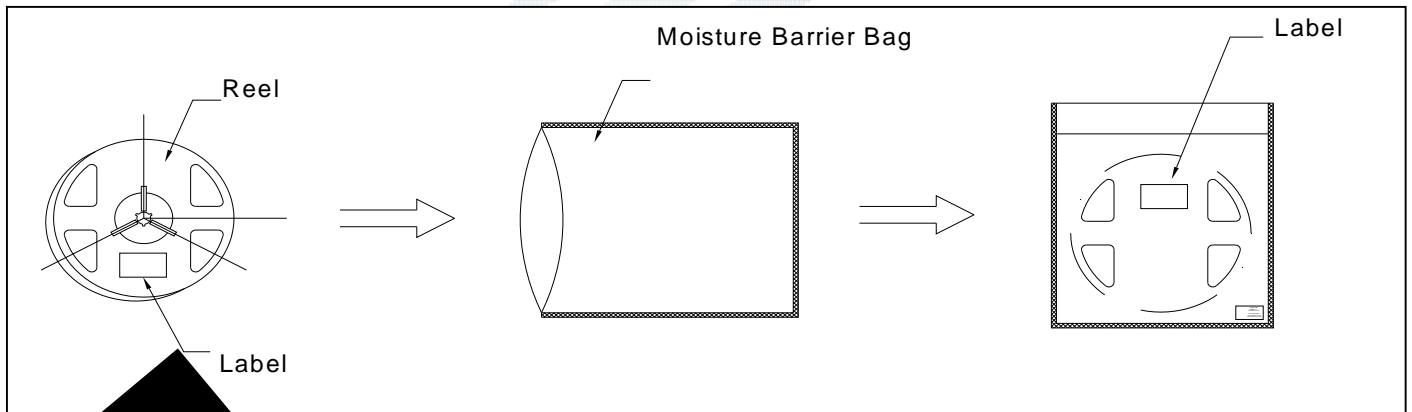


Fig.2-4Title

Fig.2-5Title

2.4 Reliability Test Items And Conditions

Table 2-3 Title

TestItems	Ref.Standard	Test Condition	Time	Quantity	Ac/Re /
Reflow	JESD22-B106	Temp:260 max T=10 sec	2times	10pcs	0/1
Thermal Shock	JEITAED-4701 300307	-40 15min 10s 100 15min	200cycles	10pcs	0/1
High Temperature Storage	JEITAED-4701 200 201	Temp:100	1000hrs	10pcs	0/1
Low Temperature Storage	JEITA ED-4701 200 202	Temp:-40	1000hrs	10pcs	0/1
Life Test	JESD22-A108	Ta=25 If=50mA	1000hrs	10pcs	0/1
High Temperature High Humidity Life Test	JESD22-A101	60 / 90%RH If=50mA	1000hrs	10pcs	0/1
Temperature Humidity Storage	JEITA ED-4701 100 103	TA=85 RH=85%	1000hrs	10pcs	0/1
Sulfur test	/	80 4H 0.6	4hrs	10pcs	0/1

2.5 Criteria For Judging Damage

Table 2-4 Title

Test Items	Symbol	Test Condition	Criteria For Judgement	
			Min.	Max.
Forward Voltage	V_F	$I_F=50mA$	-	(U.S.L*)x1.1
Reverse Current	I_R	$V_R = 30V$	-	(U.S.L*)x2.0
Luminous Flux		$I_F=50mA$	(L.S.L*)x0.7	-

Notes

1.U.S.L: Upper standard level

L.S.L: Lower standard level

2. The above reliability tests is based on the verification of a single/strip LED of Refond's existing experimental platform, the reliability experiment was taken under good heat dissipation conditions. when customers applies the LED to the series and parallel circuit, should take consideration of all the factors such as the current, voltage distribution, heat dissipation and others. / LED

LED

3.The technical information shown in the data sheets are limited to the typical characteristics and circuit examples of the referenced products. It does not constitute the warranting of industrial property nor the granting of any license.

3. SMT Reflow Soldering Instructions SMT

3.1 SMT Reflow Soldering Instructions SMT




Fig.3-1Title

Table 3-1Title

Average temperature rise speed	T_{smax} T_P	3 °C/ Max 3 °C/ s
Preheating: minimum temperature	(T_{smin})	150 °C
Preheating: Max temperature	(T_{smax})	200 °C
Preheating: Time	T_{smin} T_{smax}	60 - 120 60s-120s
Time limited to maintain high temperature: the temperature	(T_L)	217 °C
Time limited to maintain high temperature: The Time	(t_L)	60 Max 60s
Peak /Classification of temperature: /	(T_P)	260 °C
Time limit classification of peak temperature time	t_p	10 Max 10s
Hold time within 5 °C with the actual peak temperature (TP)	(T_P)	30 Max 30s
5 °C		
Cooling speed		6 °C/ Max 6 °C/ s
Needed time from 25 °C to T_p 25 °C		8 Max 8 minutes

REFOND

(3) Do not apply mechanical force or excess vibration during the cooling process to normal temperature after soldering. Do not rapidly cool device after soldering.

4. Handling Precautions

4.1 Handling Precautions

(1) LED operating environment and sulfur element composition cannot be over 100PPM in the LED mating usage material. This is provided for informational purposes only and is not a warranty or endorsement.LED

(2) In order to prevent ex-ternal material from getting into the inside of LED, which may cause the malfunction of LED, the single content of Bromine element is required to be less than 900PPM,the single content of Chlorine elementis required to be less than 900PPM,the total content of Bromine element and Chlorine element in the external materials of the application products is required to be less than 1500PPM. This is provided for informational purposes only and is not a warranty or endorsement.

(3) VOCs (Volatile organic compounds) emitted from materials used in the construction of fixtures can penetrate silicone encapsulants of LEDs and discolor when exposed to heat and photonic energy. The result can be a significant loss of light output from the fixture. Knowledge of the properties of the materials selected to be used in the construction of fixtures can help prevent these issues. Refond advises against the use of any chemicals or materials that have been found or are suspected to have an adverse affect on device performance or reliability. To verify compatibility, Refond recommends that all chemicals and materials be tested in the specific application and environment for which they are intended to be used. Attaching LEDs, do not use adhesives that outgas organic vapor.

package or resin. Ultrasonic cleaning is not recommended. Ultrasonic cleaning may cause damage to the LED.

Table 4-1 Storage

Conditions		Temperature	Humidity	Time
Storage	Before Opening Aluminum Bag	30	75%	Within 1 Year From Date
	After Opening Aluminum Bag	30	60%	24hours 24
Baking		60 5	-	24hours 24

(8) If the moisture absorbent material silica gel has faded away or the LEDs have exceeded the storage time baking treatment should be performed after unpacking and based on the following condition 60 5 for above 24 hours.



www.refond.com

REFOND

Declare

This specification is written both in English and in Chinese and the latter is formal.